


MOTTO GROUP

8-A, National Highway, Sartanpar Road, At. Sartanpar, Ta. Wankaner, Morbi - 363 621, Gujarat, INDIA


Mail. info@mottogroup.in, Web. www.mottogroup.in Toll-free. 1800 123 2124 **Call.** +91 95123 80072



ICONIC CRAFTSMANSHIP

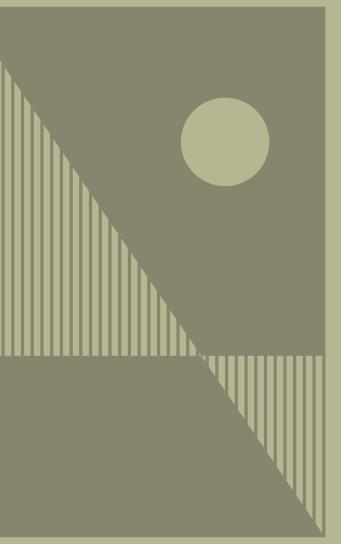






15mm Thickness





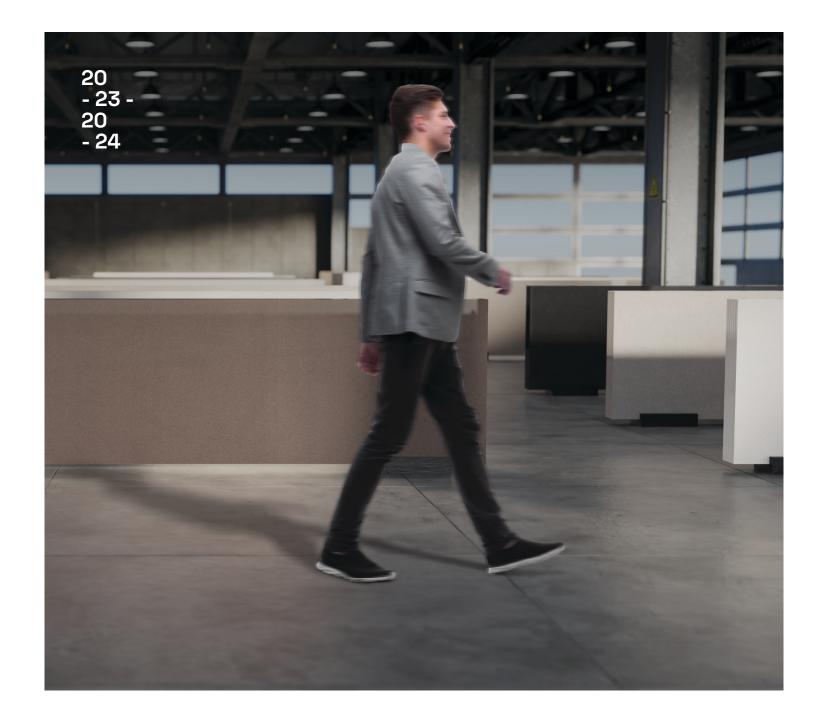




The combination of colors and designs allows for a truly individualized look that can be tailored to any aesthetic. The use of these tiles in any space will surelu bring an air of sophistication and timelessness.

DISCOVER GLORIOUS EXCELLENCE

The use of these tiles in any space will surely add a touch of sophistication, elegance and finesse.

Crafted with a unique blend of textures, these tiles offer a sophisticated yet timeless touch to any space.

With these pieces, you can create an atmosphere that feels special to you and invites conversation and creativity.

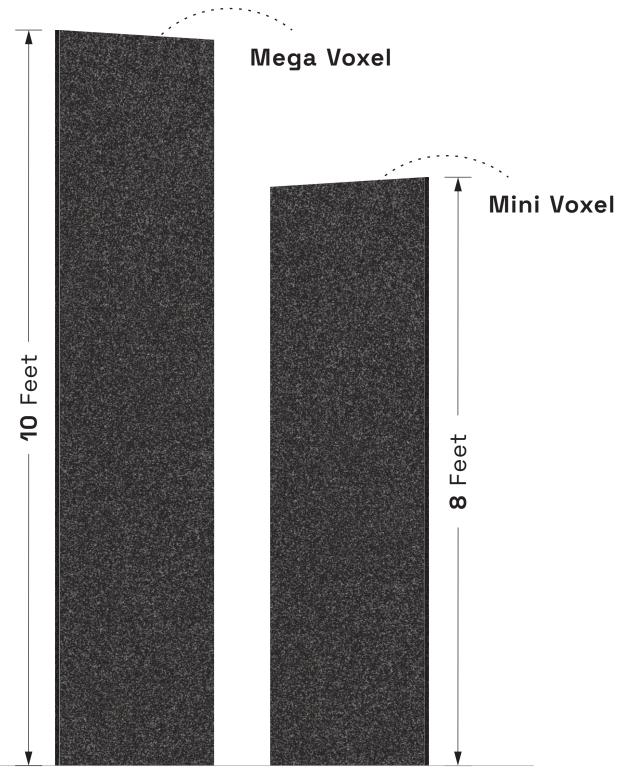

800x3000mm

800x2400mm

FULLBODY SERIES

APPROPRIATE LEVEL OF SOPHISTICATION

AVAILABLE SIZE

We have closen for you our 800x3000mm and 800x2400mm size with 15mm thickness. This size is perfect for those wanting to make a statement in any space. By choosing this size, you are guaranteed to create a beautiful atmosphere that not only fits perdectly in any room but will also invite conversation and creativity. This size is perfect fir those wanting to make a bold and vibrant statement in any space.

This size enhances the aesthetic appeal of your property and promotes a cozy environment in both commercial and residential areas. We offer a wide range of beautifully crafted tiles. As a result, creating your dream space is simple. With our different sizes, shapes and

colors to choose from, you are sure to finf a tile that fits your design style. Whether you are looking to create a timeless, classic look or something more modern and spohisticated, our tiles can help you achieve your desired aesthetic.



TILE SPECTRUM

Our range of tiles includes a variety of colors and finihes to suit every style and budget, We specialize in producing high-quality tiles using advanced technology and sustainable practices.

Our products are known for their durability, aesthetic appeal and ability to withstand wear and tear, making them ideal for both residential and commercial use.

ELEVATE YOUR STYLE WITH SPLENDOUR


🛦 Matt 🏾 🖲 Glossy 📗

| Voxel Barley | Voxel Bianco | Voxel Coco | Voxel Grey |
|---------------------|---------------------|-------------------|-------------------|
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |



🕂 15mm Thickness



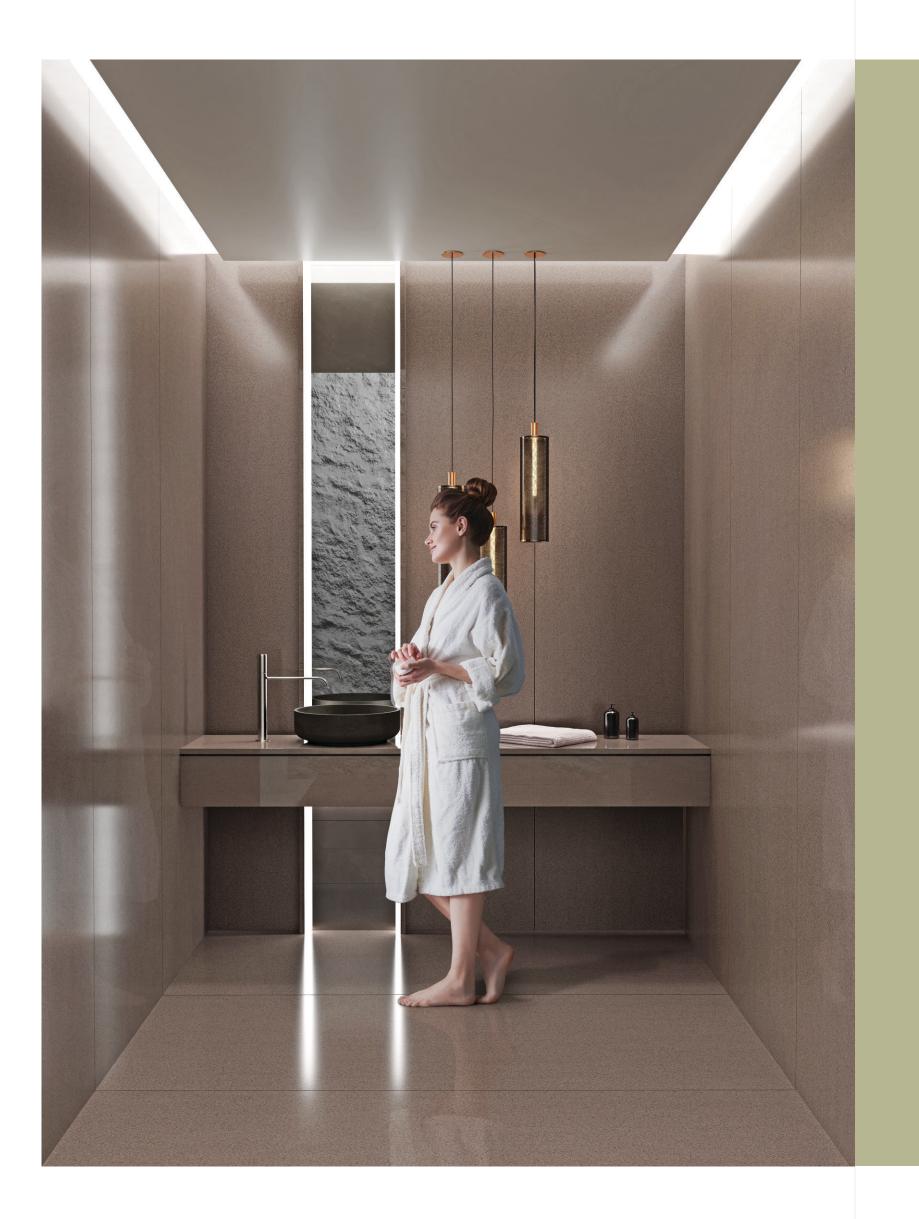

CONTINUA




Squared ridge at 45°

Rounded ridge at 45°



Double straight squared ridge

Joint Possibilities




EDGE PROFILE

MOTTO's countertops come in a variety of colors and materials, all with one thing in common: They are designed to be strong and resilient, able to withstand wear and tear over time. The cutouts of our tiles are exceptional, and the edges of these tiles are designed to offer a special sense of sophistication with beceled design that adds a unique aesthetic to any space.

APPLICATION POSSIBILITIES

| Living Room | Stair Case | Patios & O Flooring |
|------------------------|-------------------------|------------------------|
| | | |
| Kitchen Counter Top | Swimming Pool Border | Office Table |





Soft corner



Dining Area

Vanities

╘┺┸

| | <u> </u> | 5 |
|-----|----------|---|
| | | R |
| Stu | ıdy | |

Café & Restaurant







TV Room

www.mottogroup.in



FULL BODY





Body: **Full Body**

🕂 15mm Thickness





Mega Voxel **Barley**

Size: 800x3000mm


Italian Technology

FLEXIBLE BODY

MAGNIFICENT TONES PRODUCE A SENSATION OF EXCLUSIVITY AND REFINEMENT.

Indoor Application

These tiles are ideal for indoor applications such as kitchen backsplashes, bathroom walls, and accent walls in living rooms or bedrooms. Their unique design and color options allow for endless possibilities in creating a stylish and modern look.

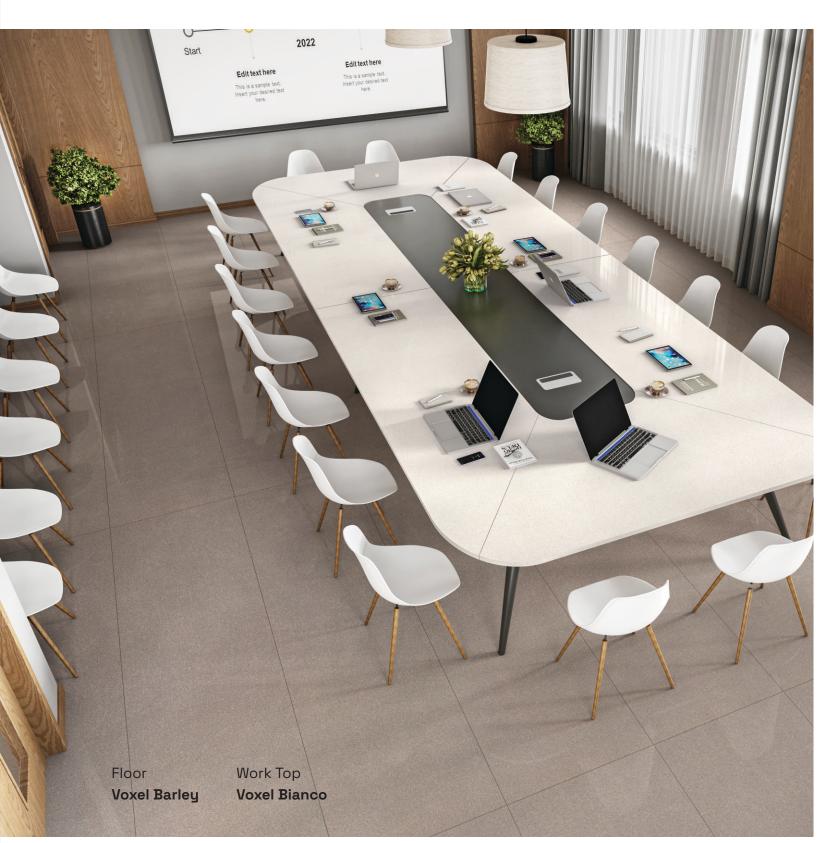















Size: **800x2400mm**





Body: **Full Body**

+ **15mm** Thickness





Mega Voxel **Bianco**

Size: 800x3000mm

Italian Technology

FLEXIBLE BODY





Mega Voxel **Coco**

Size: 800x3000mm



Mini Voxel **Coco**

Size: **800x2400mm**


Office Areas Stair Case * Study Table TV Room Bathroom Vanities Kitchen Counter Top Dining Area Living Room



^{Body:} Full Body

+ 15mm Thickness



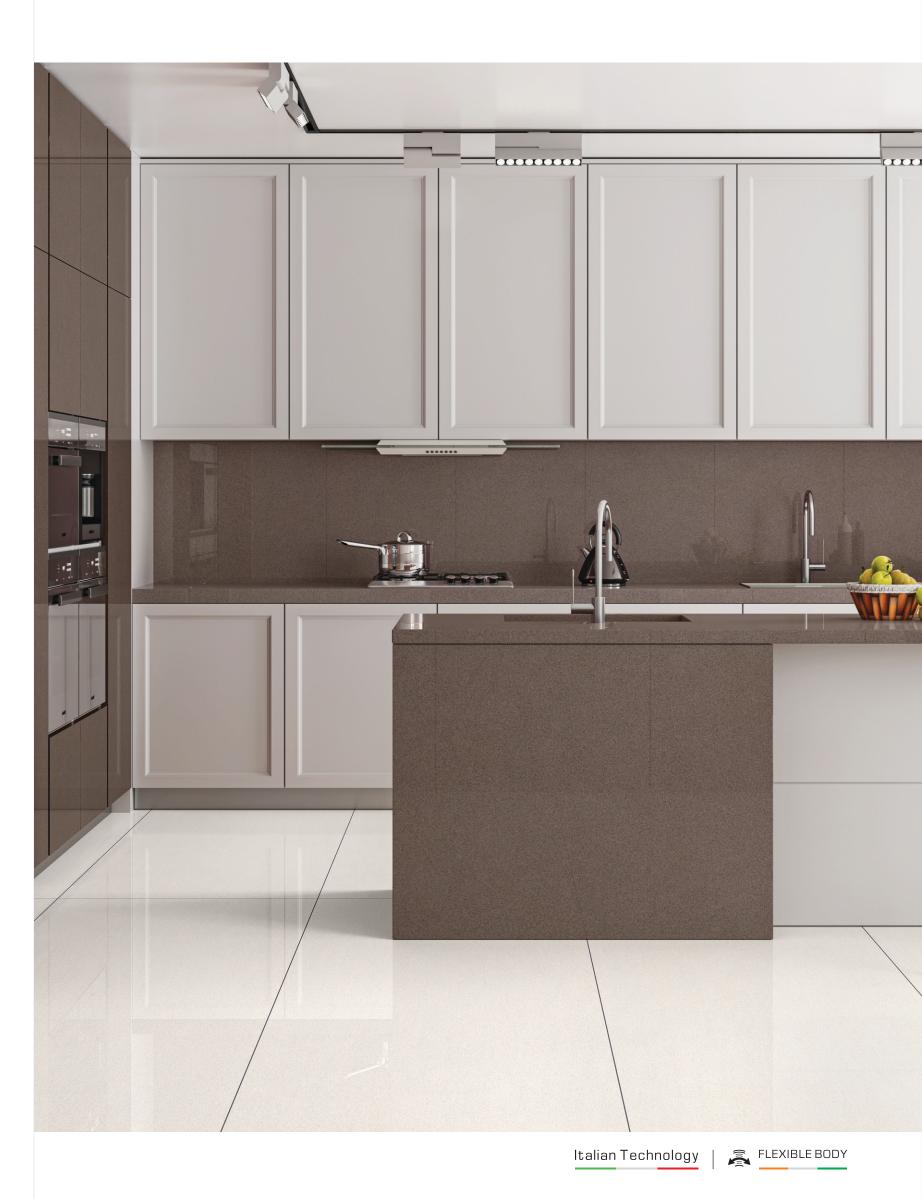

FULL BODY





Mega Voxel **Grey**

Size: 800x3000mm



Mini Voxel **Grey**

Size: **800x2400mm**

| Office Areas | Stair Case |
|----------------------|------------------------|
| | |
| Study Table | TV Room |
| | |
| Bathroom Vanities | Kitchen Counter Top |
| | |
| Dining Area | Living Room |



Body: **Full Body**

🕂 15mm Thickness






FULL BODY

Italian Technology


👼 FLEXIBLE BODY



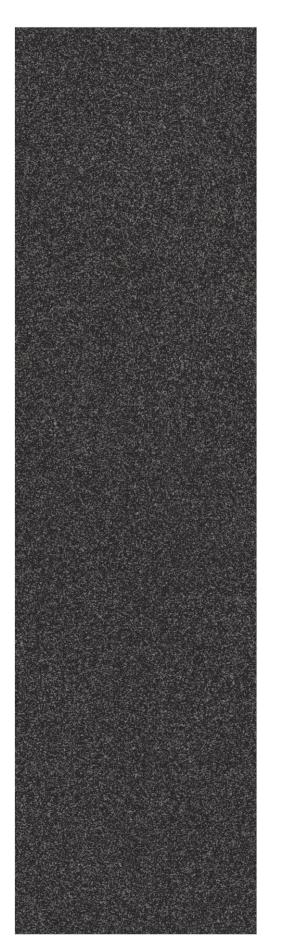

Mega Voxel **Nero**

Size: 800x3000mm

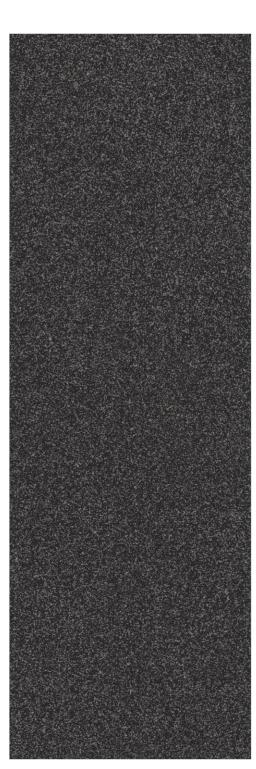

Mini Voxel **Nero**


Size: 800x2400mm

| Office Areas | Stair Case |
|----------------------|------------------------|
| | |
| Study Table | TV Room |
| | |
| Bathroom Vanities | Kitchen Counter Top |
| | |
| Dining Area | Living Room |



Body: **Full Body**





FULL BODY



Italian Technology







Size: 800x2400mm

Mega Voxel **White**


Size: 800x3000mm





Body: **Full Body**







FULL BODY

Italian Technology


FLEXIBLE BODY




MANUALLY TRANSPORTING SLAB


Only for 1/4" Slabs

MOVING A SLAB






RAISING A IMMODERATE SLAB ONTO A BENCH




X INCORRECT




V CORRECT

HANDLING IMMODERATE SLAB FOR WALL



X INCORRECT



✓ CORRECT

WORKING WITH THE VARIOUS VERSIONS OF SLAB

CUTTING WITH DIAMOND DISCS




Our products can be cut using diamond discs fitted onto the hand-held electrical grinding machine. The speed of Disc rotation must be high (>10000 RPM) and should have a low feed rate (< 1 m/min). It may be required to cool the disc with water. Recommended discs are the thin types generally used for cutting porcelain stoneware. The surface should be kept on a FLAT base while cutting without any gap underneath.

DRILLING




You can use cutting discs fitted to battery-operated screwdrivers or angle grinders, or electrical drills as an alternative.


INTERNAL CUT/L-SHAPED CUT



EDGE-FINISHING








To get internal and L-shaped corners & to reduce the risk of breakage, cut 'o' at the vertex of the internal corners using bits with a radius of at least 5mm. Then cut with diamond discs, be cautious to stop moving the cutting tool forward. To drill and cut using diamond discs, and more follow the instructions provided below:

When using these tools:

- -Cool the point being drilled with water
- -Don't put too much pressure and bear in mind the resistance of the type of laminated stoneware you are working on
- -If you are using tungsten bits, start drilling at a low speed
- -If you are using drills or screwdrivers, do not select hammering mode




INSTRUCTIONS FOR MANUAL INSTALLATION

SINGLE LAYER METHOD

DOUBLE-LAYER METHOD







COMPRESSING THE SLAB

IMPORTANT

All cutout corners must have a minimum diameter of 1/4". Never leave 90° angles. We recommend a radius of more than 1/4" when the kitchen design allows as it makes the countertop firmer.



CLEANING & MAINTENANCE

Our products are non porous (due to their high quality raw materials, stringent production parameters and state of the art technology), hence any dust or deposited waste cannot penetrate the surface.

For most cases only a damp cloth is sufficient for cleaning.

Regular cleaning highlights the aesthetic features of the surface and gives it exceptional shine.

For highly aggressive cleaning caused by some common food and substances follow the table below.

| TYPE OF STAIN | CHEMICAL PRODUCT | EXAMPLE |
|---------------|--------------------|--|
| Grease | Alkaline - Solvent | Detergent |
| Oil | Solvent | Ammonia, Baking Soda |
| Ink | Oxidant - Solvent | Alcohol, Liquid Bleach, Nail Paint Remover |
| Rust | Acid | Hydrochloric Acid, Vinegar, Red Harpic |
| Lime | Acid | Descaling Agents, Hydrochloric Acid |
| Cement | Acid | Hydrochloric Acid |
| Wine | Alkaline | Ammonia, Liquid Bleach |
| Coffee | Alkaline - Solvent | Ammonia, Liquid Bleach |
| Rubber | Solvent | Alcohol, Thinner |
| Plaster | Acid | Hydrochloric Acid |
| Candle Wax | Solvent | Alcohol, Thinner |
| lodine | Oxidant | Liquid Bleach |
| Blood | Oxidant | Liquid Bleach |
| Ice Cream | Alkaline | Liquid Bleach |

PACKING DETAILS

| Dimension (mm) | |
|----------------|--|
| 800x3000mm | |
| 800x2400mm | |

Note: It is recommended that any kind of stain needs to be cleaned immediately, as soon as possible.

TECHNICAL SPECIFICATIONS

| CHARACTERISTICS | STANDARD AS PER ISO-13006/2018 En14411 gr.bla | MOTTO VALUE | TEST METHOD |
|-----------------------------|---|---------------------------|--------------|
| | Regulatory Prope | erties | · |
| Deviation in Length & Width | ± 0.5% | ± 0.2% | ISO 10545-2 |
| Deviation in Thickness | ± 5% | ± 5% | ISO 10545-2 |
| Straightness of Sides | ± 0.5% | ± 0.2% | ISO 10545-2 |
| Rectangularity | ± 0.5% | ± 0.2% | ISO 10545-2 |
| Surface Flatness | ± 0.5% | ± 0.3% | ISO 10545-2 |
| Colour Difference | ΔΕ<1.00 | ΔΕ<0.30 | ISO 10545-16 |
| Glossiness | As per Mfg. | As Per Mfg. | Gloss Meter |
| | Regulatory Prope | erties | |
| Water Absorption | ≤ 0.5 % | ≤ 0.3 % | ISO 10545-3 |
| Apparent Density | As Per Mfg. | >2.20 g/cc | ISO 10545-3 |
| | Massive Mechanical F | Properties | 1 |
| Modulus of Rupture | Min.35N/mm ² | Min.40N/mm ² | ISO 10545-4 |
| Breaking Strength | Min. 1300 N | Min. 5000 N | ISO 10545-4 |
| Impact Resistance | As per Mfg. | Min. 0.55 | ISO 10545-4 |
| | Surface Mechanical F | Properties | · |
| Surface Abrasion Resistance | As per Mfg. | Min. class 3 | ISO 10545-7 |
| Mohs Hardness | As per Mfg. | Min. class 4 | BS EN 15771 |
| | Massive Mechanical F | Properties | · |
| Frost Resistance | As Per Mfg. | Frost Proof | ISO 10545-12 |
| Thermal Shock Resistance | Min. 10 Cycle | Min. 10 Cycle | ISO 10545-9 |
| Moisture Expansion | Max. 0.6mm/m | Max. 0.02mm/m | ISO 10545-10 |
| Thermal Expansion | Max. 9.0 x 10 ⁻⁶ | Max. 6.0x10 ⁻⁶ | ISO 10545-8 |
| | Chemical Prope | rties | · |
| Chemical Resistance | As Per Mfg. | No Damage | ISO 10545-13 |
| Stain Resistance | Resistant | Resistant | ISO 10545-14 |
| | Safety Propert | ties | |
| Slip Resistance | As per Mfg. | N. A. | DIN 51130 |
| Fire Resistance | As per Mfg. | Fire Proof | N. A. |

| No. of Pcs/Box | Square Feet | Weight (Approx) |
|----------------|--------------|-----------------|
| 1 Pcs. | 25.83 Sq. ft | 83 kg. |
| 1 Pcs. | 20.67 Sq. ft | 68 kg. |

