



Experience the allure of timeless elegance with our Aspire Series GVT tiles collection, available in 600x1200mm size. Elevate your spaces with sophisticated designs and unparalleled quality, adding a touch of luxurious charm to every room. Effortlessly transform your interiors with the enduring beauty and durability of Aspire's exquisite GVT tiles.





## HIGH GLOSS COLLECTION

600x 1200mm

GLAZED VITRIFIED TILES

















TO LOADS

RESISTANT

WIDE RANGE

HIGH **GLOSS** 
















RESISTANT TO RESISTANT CHEMICAL TO LOADS


RESISTANT

#### ASPIRE LUCIDO ALLEGRA TEAL







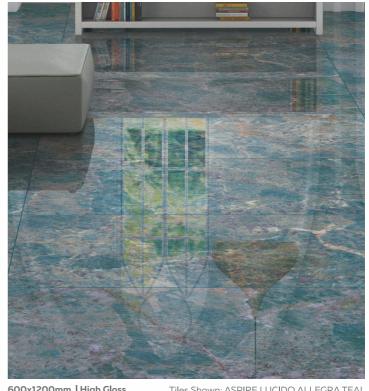

600x1200mm | High Gloss

Tiles Shown: ASPIRE LUCIDO ALLEGRA TEAL



HIGH **GLOSS** 
















RESISTANT TO RESISTANT CHEMICAL TO LOADS

RESISTANT

ASPIRE LUCIDO FOSSIL BLACK









600x1200mm | High Gloss

Tiles Shown: ASPIRE LUCIDO FOSSIL BLACK


















VERSATILE

RESISTANT TO RESISTANT

RESISTANT

ASPIRE LUCIDO LEVANTO TEAL









600x1200mm | High Gloss

Tiles Shown: ASPIRE LUCIDO LEVANTO TEAL



















RESISTANT TO RESISTANT CHEMICAL TO LOADS

RESISTANT

ASPIRE LUCIDO MYSTIQUE NERO

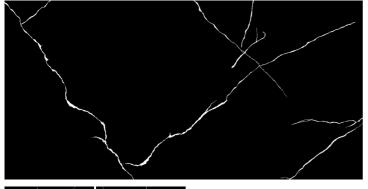








600x1200mm | High Gloss

Tiles Shown: ASPIRE LUCIDO MYSTIQUE NERO

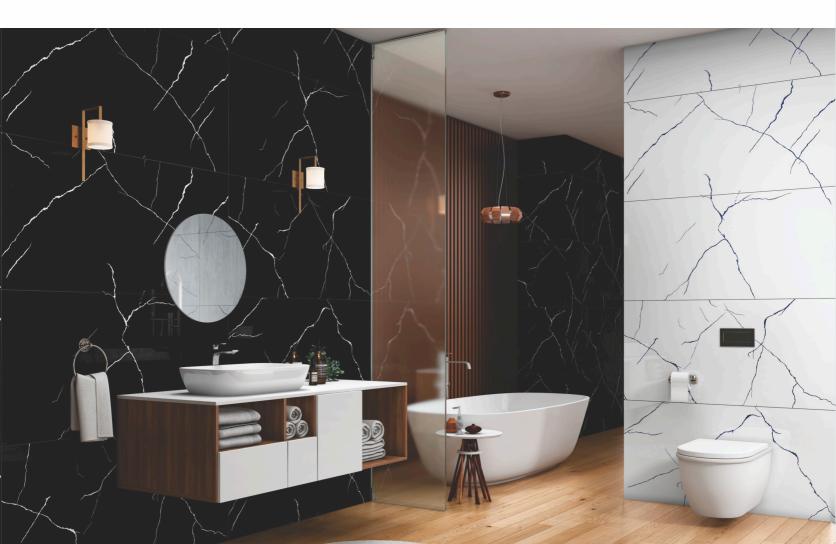















RESISTANT TO RESISTANT CHEMICAL TO LOADS


RESISTANT

ASPIRE LUCIDO OCEAN BLUE







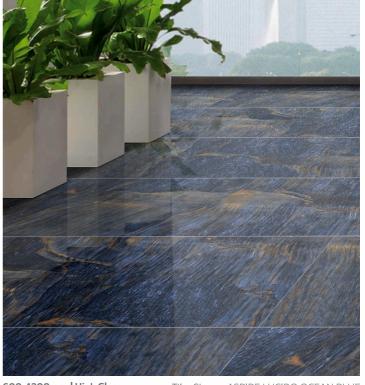

600x1200mm | High Gloss

Tiles Shown: ASPIRE LUCIDO OCEAN BLUE



HIGH GLOSS















RESISTANT TO RESISTANT CHEMICAL TO LOADS

RESISTANT

#### ASPIRE LUCIDO PULPIS BRONZE









600x1200mm | High Gloss

Tiles Shown: ASPIRE LUCIDO PULPIS BRONZE





## FULL POLISH **ENDLESS**

COLLECTION

600x 1200mm

**GLAZED** VITRIFIED TILES















**VERSATILE** SOLUTIONS

**EASIER** TO LAY RESISTANT TO RESISTANT CHEMICAL

TO LOADS

RESISTANT

WIDE RANGE















RESISTANT TO RESISTANT CHEMICAL TO LOADS

RESISTANT

ASPIRE EL DIVINITY ASH FP










600x1200mm | Full Polish

Tiles Shown: ASPIRE EL DIVINITY ASH FP

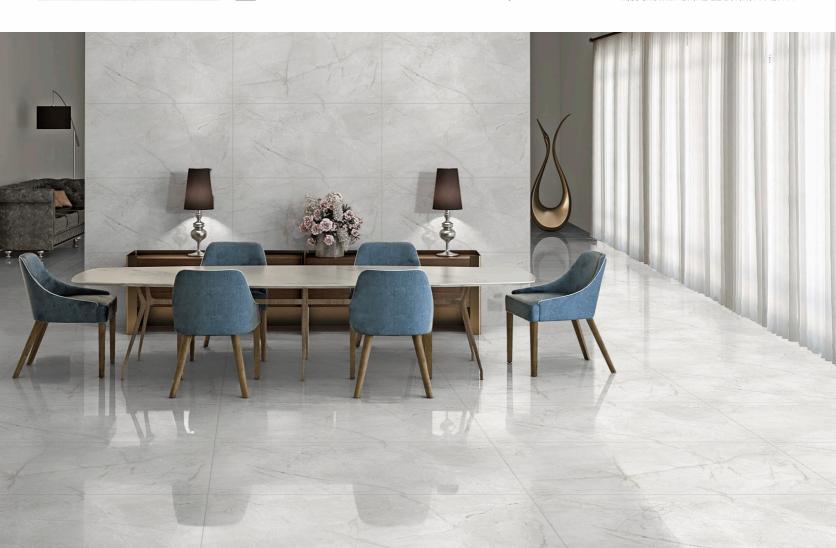

**FULL POLISH ENDLESS** 















RESISTANT TO RESISTANT CHEMICAL TO LOADS

RESISTANT

ASPIRE EL LASA BEIGE FP









600x1200mm | Full Polish

Tiles Shown: ASPIRE EL LASA BEIGE FP





# FULL POLISH

COLLECTION

600x 1200mm

GLAZED VITRIFIED TILES















**VERSATILE** SOLUTIONS

EASIER TO LAY RESISTANT TO RESISTANT

TO LOADS

RESISTANT

WIDE RANGE















VERSATILE

RESISTANT TO RESISTANT CHEMICAL TO LOADS

RESISTANT

WIDE RANGE

ASPIRE CAMUS LIGHT GREY FP









600x1200mm | Full Polish

Tiles Shown: ASPIRE CAMUS LIGHT GREY FP



FULL POLISH
















RESISTANT

ASPIRE CAMUS DARK GREY FP










600x1200mm | Full Polish

Tiles Shown: ASPIRE CAMUS DARK GREY FP

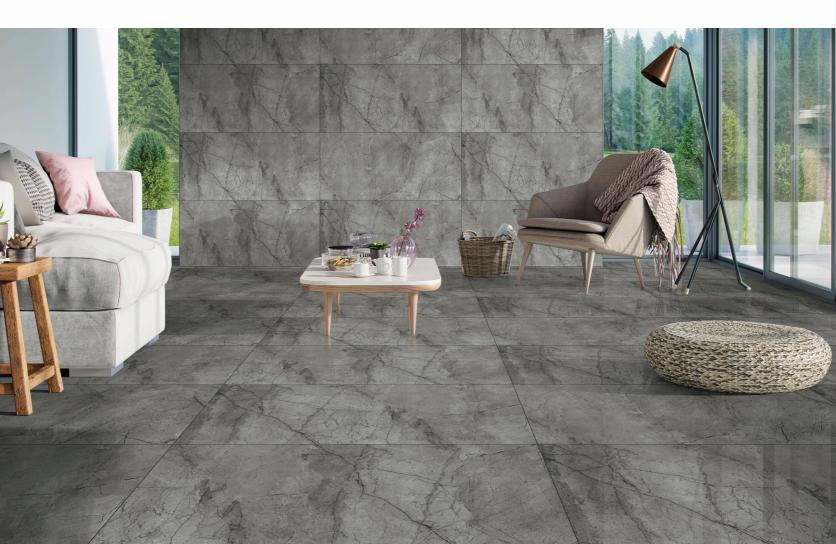















**1**22

TILE EASIER RESISTANT TO RESISTANT RESISTANT
ONS TO LAY CHEMICAL TO LOADS TO STAINS

WIDE RANGE

ASPIRE CANCUN CREMA FP









600x1200mm | Full Polish

Tiles Shown: ASPIRE CANCUN CREMA FP



















RESISTANT TO RESISTANT CHEMICAL TO LOADS

RESISTANT

ASPIRE FLOS OYSTER FP









600x1200mm | Full Polish

Tiles Shown: ASPIRE FLOS OYSTER FP



**FULL POLISH** 















RESISTANT TO RESISTANT CHEMICAL TO LOADS

RESISTANT

#### ASPIRE FLOS LIGHT GREY FP









600x1200mm | Full Polish

Tiles Shown: ASPIRE FLOS LIGHT GREY FP



FULL POLISH















RESISTANT TO RESISTANT CHEMICAL TO LOADS

RESISTANT

ASPIRE FLOS DARK GREY FP









600x1200mm | Full Polish

Tiles Shown: ASPIRE FLOS DARK GREY FP



FULL POLISH















**.** 

RESISTANT TO RESISTANT RESIST CHEMICAL TO LOADS TO STA

RESISTANT TO **STAINS** 

WIDE RANGE

#### ASPIRE MYSTIQUE WHITE FP





























VERSATILE

RESISTANT TO RESISTANT CHEMICAL TO LOADS

RESISTANT

ASPIRE NATIVA PINK FP









600x1200mm | Full Polish

Tiles Shown: ASPIRE NATIVA PINK FP



FULL POLISH

















RESISTANT TO RESISTANT CHEMICAL TO LOADS

RESISTANT

#### ASPIRE VANCOUVER CREMA FP









600x1200mm | Full Polish

Tiles Shown: ASPIRE VANCOUVER CREMA FP

















RESISTANT

ASPIRE VANCOUVER BEIGE FP









600x1200mm | Full Polish

Tiles Shown: ASPIRE VANCOUVER BEIGE FP

















VERSATILE

RESISTANT

ASPIRE RADDIX WHITE FP









600x1200mm | Full Polish

Tiles Shown: ASPIRE RADDIX WHITE FP

















RESISTANT TO RESISTANT CHEMICAL TO LOADS

RESISTANT

ASPIRE STATUARIO SELECT FP









600x1200mm | Full Polish

Tiles Shown: ASPIRE STATUARIO SELECT FP

















WIDE RANGE

RESISTANT TO RESISTANT CHEMICAL TO LOADS TO STAINS

ASPIRE VEGAS GOLD FP









600x1200mm | Full Polish

Tiles Shown: ASPIRE VEGAS GOLD FP





# MATT CARVING

COLLECTION

600x 1200mm

GLAZED VITRIFIED TILES















**VERSATILE** SOLUTIONS

EASIER TO LAY RESISTANT TO RESISTANT

TO LOADS

RESISTANT

WIDE RANGE















RESISTANT TO RESISTANT CHEMICAL TO LOADS

RESISTANT

ASPIRE IMP ASTORE MUSHROOM









600x1200mm | Carving

Tiles Shown: ASPIRE IMP ASTORE MUSHROOM



MATT CARVING

















VERSATILE

RESISTANT TO RESISTANT CHEMICAL TO LOADS

RESISTANT

ASPIRE IMP CORAS STATUARIO









600x1200mm | Carving

Tiles Shown: ASPIRE IMP CORAS STATUARIO


















RESISTANT TO RESISTANT CHEMICAL TO LOADS

RESISTANT

WIDE RANGE

#### ASPIRE IMP DRAGO BIANCO









600x1200mm | Carving

Tiles Shown: ASPIRE IMP DRAGO BIANCO



















RESISTANT TO RESISTANT CHEMICAL TO LOADS

RESISTANT

ASPIRE IMP IRISH CREAMA









600x1200mm | Carving

Tiles Shown: ASPIRE IMP IRISH CREAMA







#### **DESIGN, PATTERN & SHADE VARIATION GUIDE**


Current development efforts have made ceramic tiles to resemble and look authentically identical to natural material (Stone, Wood, Fabric), and it has become increasingly difficult in many cases, to distinguish between two.

Recognising this situation, it is necessary to be informed on the grade of design & pattern variationthatis expected from the seproducts. As a general reference, the design & Pattern guide below classifies a scale of ranges according to the degree of variation.









The classification is as follow:

V1 Uniform Appearance

✓ Minimal Variation ✓ Random Variation ✓ Slight Variation ✓ Substantial Variation



High Definition Image

While laying the tiles please follow the arrow on the back of the tiles. For removing the wax from the surface of the tiles please use the soft cotton cloth for rubbing with any boric/talk powder



#### VEILCRAFT (VC) SHIELD

Not only look and style; the buzz word for the Gen X tile is timeless elegance. Here comes the revolutionary patented "VeilCraft (VC) Shield" technology, a 'high abrasion resistant glaze composition', known as VC (VeilCraft) Shield. This is the first ever patented technology in Indian Ceramic Industry. This not only gives you the perfect aesthetics for your space but also the lifelong protection to your floor.

#### Result Of The abrasion test at 25,000 revolutions as per the PEI Methodology












Polished Vitrified Tile

Patent Certificate for "High Abrasion Resistant Glaze" applied on VC Shield Tiles






PACKING DETAIL FOR 600x1200mm GVT TILES						
Nominal Size (mm)	Thickness(mm)	Average weight per carton (Kgs)	No. of tiles per carton	Coverage area per carton		
600x1200mm	8.5 mm	27.5 (+/-0.0) Kgs	2 Pcs	1.44sq.mtr. / 15.50sq.ft.		

TECHNICAL SPECIFICATION FOR 600x1200mm GVT TILES							
Characteristics	Requirement as per IS 15622 :2017 0.08 < E ≤ 3% Group Blb	Requirement as per ISO 13006 ≤ 0.5% Group Bla	Our Values	Test Method			
A) Dimension & Surface Quality							
I) Length & Width	± 0.10%	± 0.3%	± 0.10%				
ii) Thickness	± 5.0%	± 5.0%	± 4.0%				
iii) Straightness of Side	± 0.10%	± 0.3%	± 0.10%				
iv) Rectengularity	± 0.10%	± 0.3%	± 0.10%				
v) Surface Flatness				IS 13630 Part 1/ ISO 10545-2			
a) Center curvature (%) ( max.Deviation)	± 0.50%	± 0.4%	± 0.2 %				
b) Edge curvature (%) { max.Deviation)	± 0.50%	± 0.4%	± 0.2 %				
c) Corner warpage (%)( max.Deviation)	± 0.50%	± 0.4%	± 0.2 %				
vi) Surface Quality	Min. 95 % of tiles will be free from visible defects	Min. 95 % of tiles will be free from visible defects	Min. 95 % of tiles will be free from visible defects				
B) Physical Properties							
i) Water Absorption	Av. 0.08 <e %,="" 3="" 3.3="" individual="" max<="" td="" ≤=""><td>Av ≤ 0.5 %, Individual 0.6% max</td><td>Avg. E≤ 0.5 %</td><td>IS 13630 Part 2/ ISO 10545</td></e>	Av ≤ 0.5 %, Individual 0.6% max	Avg. E≤ 0.5 %	IS 13630 Part 2/ ISO 10545			
ii) Modulus of Rupture [N/mm²]	Av 30, Individual 27 min	Av 35, Individual 32 min	Avg.35	IS 13630 Part 6/ISO 10545-4			
iii) Breaking Strength in N	1100	1300	Min, 1300				
iv) Scratch Hardness of surface (Mohs)	Min 5	N/A	Min.5	IS 13630 Part 13			
v) Resistance to Abrasion of glazed tiles( Class I to V )	Min II	Abrasion Class & Cycle passed	Class-V	IS 13630 Part 11 /ISO 10548			
vi) Coefficient of linear thermal expansion from embiant temperature to 100° C	7 X 10 <sup>-6</sup> K <sup>-1</sup> max	Test Method Available	Max 6 X 10 <sup>-6</sup> K <sup>-1</sup> max	IS 13630 Part 4/ ISO 10545			
vii) Thermal Shock Resistance	10 cycle min	Test Method Available	10 cycle passed	IS 13630 Part 5/ISO-10545			
viii) Crazing Resistance	4 cycle @ 7.5bar min	Required	4 cycle passed	IS 13630 Part 9/ISO 10545-			
ix) Impact Resistance as Co-efficient of Restitution (COR)	0.55 min	Test Method Available	Min 0.55	IS 13630 Part-14/ISO 10545			
x) Frost Resistance	Required	Required	100 Cycle Passed	IS 13630 Part 10/ISO 10545			
C) Chemical Resistance (glazed Tiles)							
I) Stain Resistance	Min Class 1	Min Class 3	Min Class-1	IS 13630 Part 8 &ISO 10545			
ii) Resistance to household chemicals	Min Class AA	Min B	Min Class AA	IS 13630 Part 8/ ISO 10545-1			
iii) Resistance to acids and alkalis (with exception of hydrofluoric acid and its compounds)	Required if agreed	Declared Value	Min Class AA				

The reproduction of tiles in this catalogue is restricted to four color printing only and tiles are not in relative sizes, therefore customers are advised to see the physical sample before placing the order. "Technical Specification" for Somany wall & floor tiles are applicable only for premium quality tiles. Please inspect all tiles prior to installation. Company will not entertain complaints once tiles are laid/fixed.

Complaints will not be entertained for Borders, Highlighters & Motifs.

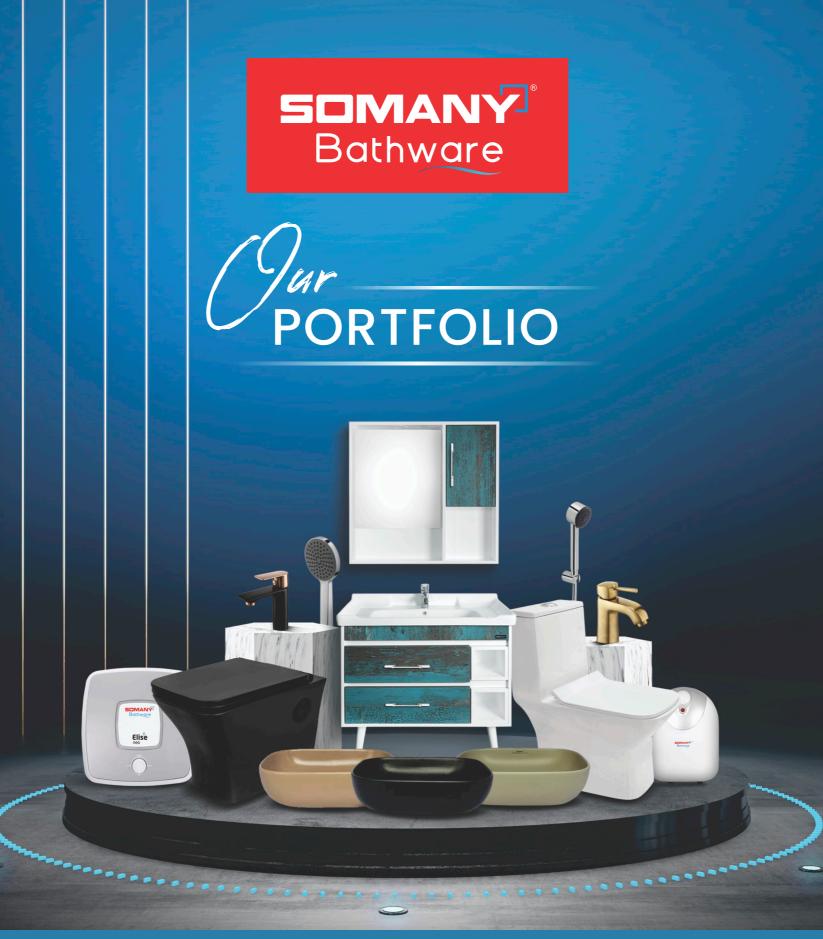

Water Closets | Basins | Faucets | Showers | Water Heaters | Accessories







### HIGH STRENGTH POLYMER MODIFIED

### **TILE ADHESIVE**



#### **BENEFITS**

- » READY AND EASY TO USE
- » EXCELLENT BONDING WITH ALL SURFACES
- FAST SETTING
- SELF-CURING

#### **USES**

- FOR FIXING ALL TYPE OF TILES
- FOR NEW FLOORING AND RENOVATION
- » CAN BE USED FOR TILE ON TILE





#### **Power of Desire**





Somany Ceramics Limited: Noida: F-36, Sector-6; Ph.: 0120-4627900.

Ahmedabad: 601 to 606, 6th floor, Aalps Euphoria, Opp. Adani CNG Pump, B/s. Gota Flyover, S. G, Highway, Ahmedabad- 382481, Ph.: 079-27661103 & 04 Registered office: 2, Red Cross Place, Kolkata - 700001; Ph.(033) 22487406/5913

www.somanyceramics.com I e-mail marketing@somanyceramics.com

Toll Free No. 1800-103-0004 (Timing-10:00am to 6:30pm; Mon-Fri)





Find us at:





Available on the App Store



ASPIRE / CAT / JANUARY 2024