



DURAGRES

SOMANY
TILES | BATHWARE



SOMANY

Somany Ceramics Limited : Noida: F-36, Sector-6; Ph.: 0120-4627900.
Ahmedabad: 601 to 606, 6th floor, Aalps Euphoria, Opp. Adani CNG Pump, B/s. Gota Flyover, S. G, Highway, Ahmedabad- 382481, Ph.: 079-27661103 & 04
Registered office: 2, Red Cross Place, Kolkata - 700001; Ph.(033) 22487406/5913
www.somanyceramics.com | e-mail marketing@somanyceramics.com

Toll Free No. 1800-103-0004 (Timing-10:00am to 6:30pm; Mon-Fri)



Visit us at:
www.somanyceramics.com



Find us at:
www.facebook.com/SomanyCeramic



Find us at:
www.twitter.com/SomanyCeramic



Find us at:
www.instagram.com/SomanyCeramics



DURAGRES / CAT / AUGUST 2024

UNIT - 3
WEST & CENTRAL

Glazed Vitrified Tiles
600x600 mm

DURAGRES

Introducing the FAB Series of Glazed Vitrified Tiles – a perfect blend of elegance and durability. Our collection features both Full Polish and matt finishes, offering a sophisticated shine or a subtle, refined texture to suit any design preference. Each tile in the FAB Series is crafted with precision, ensuring high resistance to stains and scratches while maintaining a stunning aesthetic. Additionally, the series includes decor tiles, adding an artistic touch to your space. Transform your interiors with the unmatched quality and style of the FAB Series.

— 600x600mm —
GLAZED VITRIFIED TILES

Blend
with Nature



ESSENCE
OF NATURE

600x
600mm

APPLICATION

- 
RESIDENCES
- 
HOTELS
- 
OFFICES
- 
RAILWAY
STATIONS
- 
MALLS
- 
KITCHENS
- 
RESTAURANTS
- 
SHOPS
- 
BATHROOMS
- 
AIRPORTS

CONTENT

Polish

06


Matt

20

Carving

41

Class of
MAGNIFICENCE

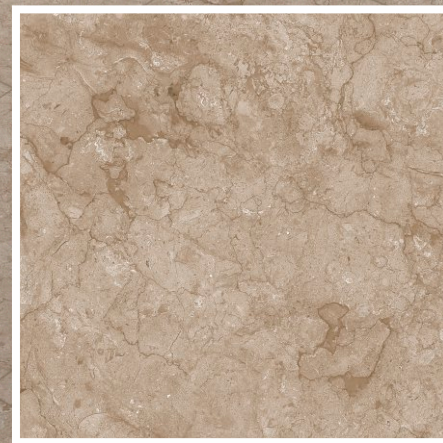


Transform your home into a picturesque abode with these timeless tiles, crafted to perfection for those who seek the best in both style and substance.

DURAGRES
Timeless Elegance




Tiles Shown: FAB ALBATO DARK GREY FP

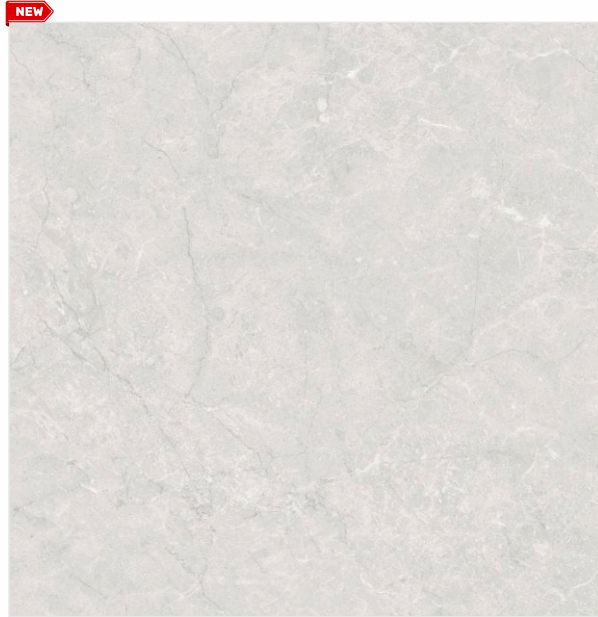


FAB ADRIK BIANCO FP

V4

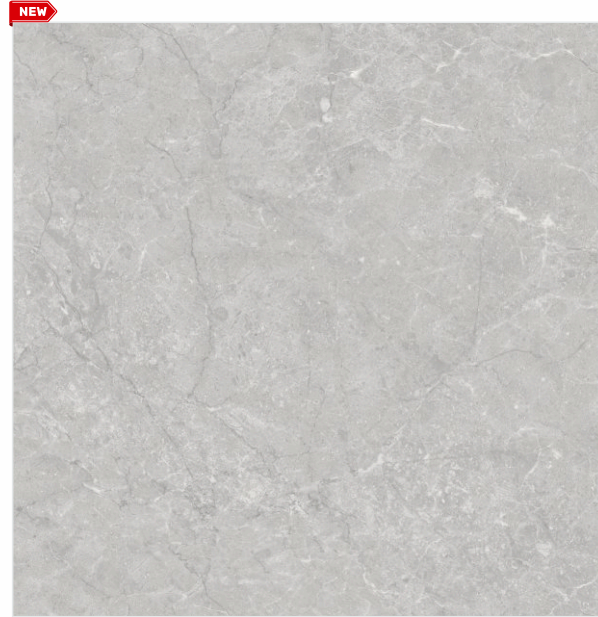

FAB ADRIK GREY FP

V4

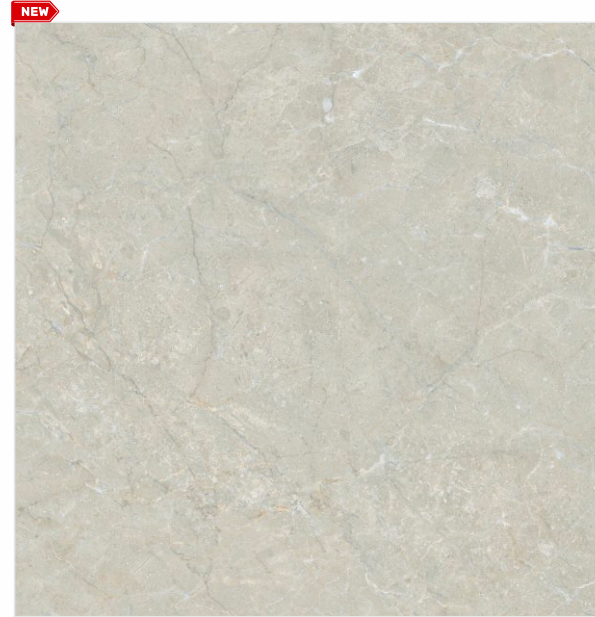


FAB ADRIK MUSHROOM FP

V4




FAB ATLANTA GREY FP

V2

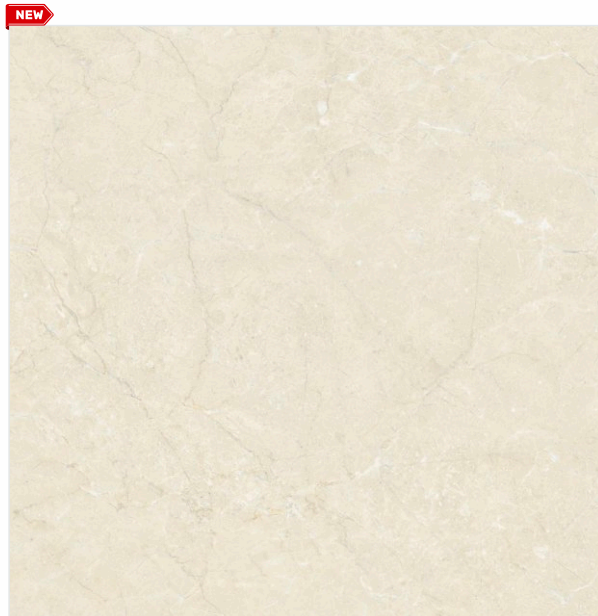

FAB ADRIK CREMA FP

V4

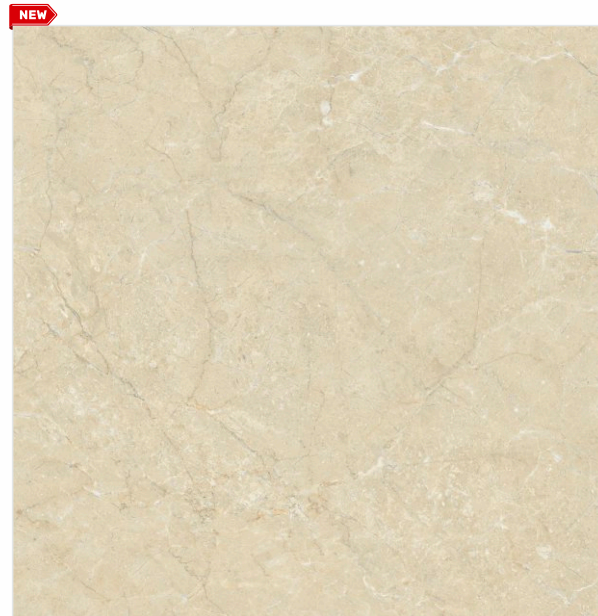


FAB ADRIK BEIGE FP

V4




FAB ADELYN BEIGE FP

V3

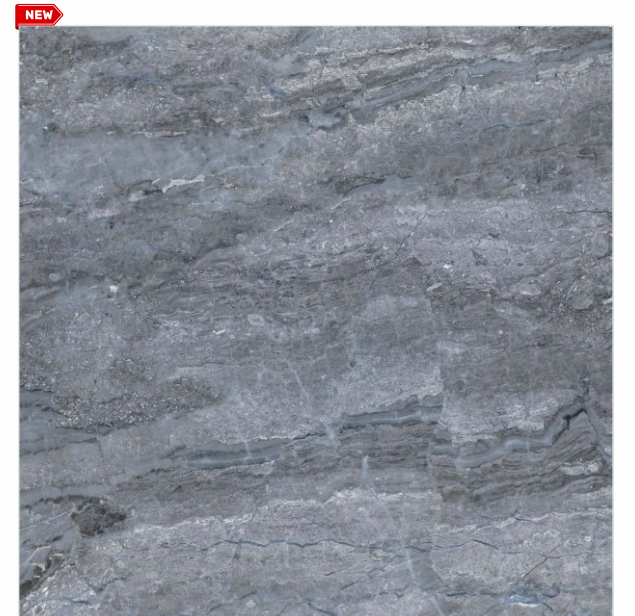

FAB ADELYN COBALT FP

V3

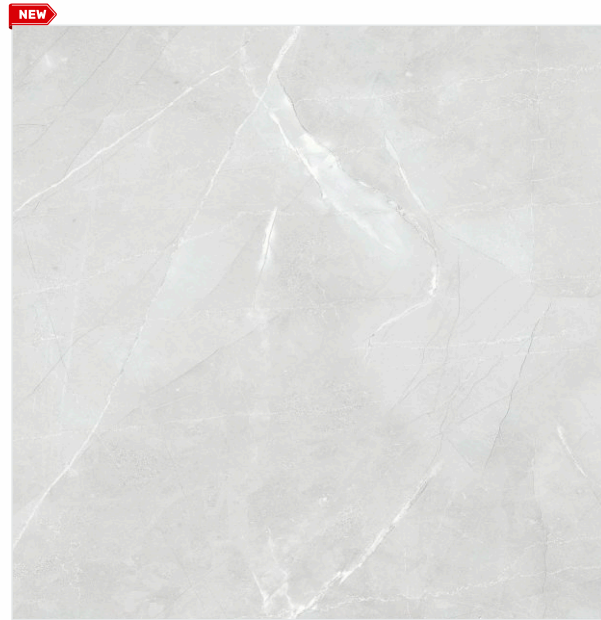

FAB ALBATO LIGHT GREY FP

V4




FAB ALBATO DARK GREY FP

V4




FAB LARISA GREY FP

V4

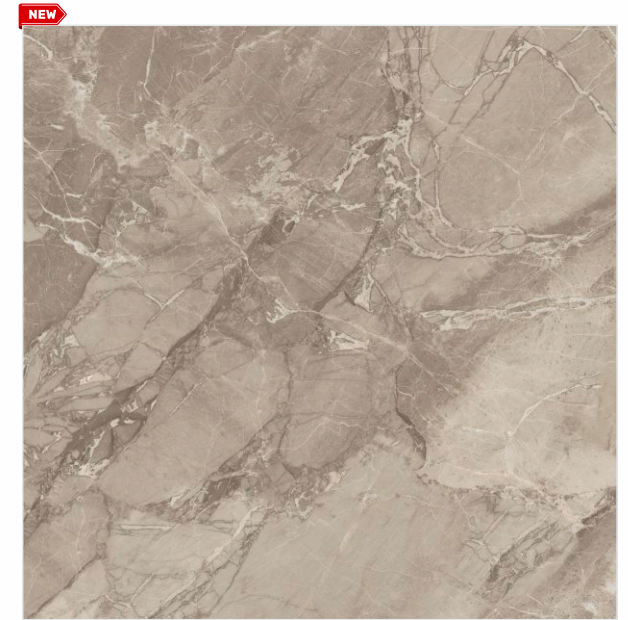


FAB LARISA BEIGE FP

V4

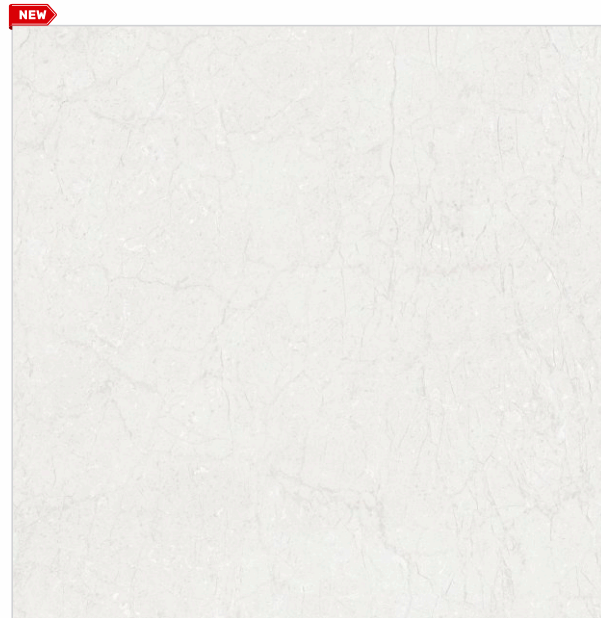


FAB DINARA BIANCO FP

V4

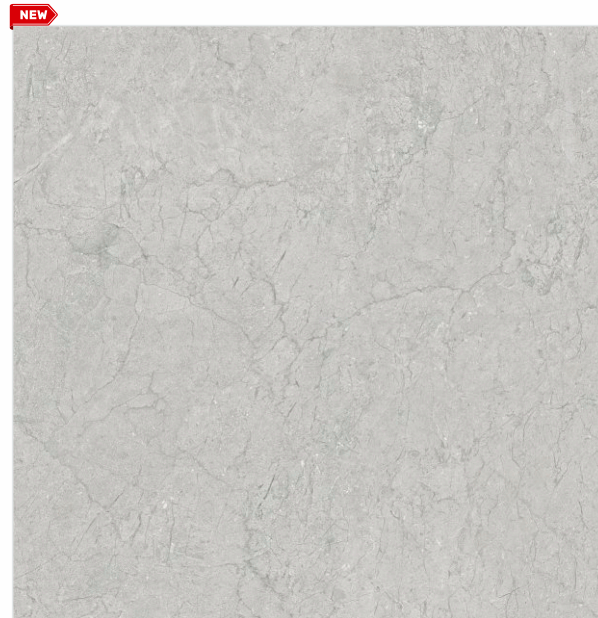


FAB DINARA GREY FP

V4

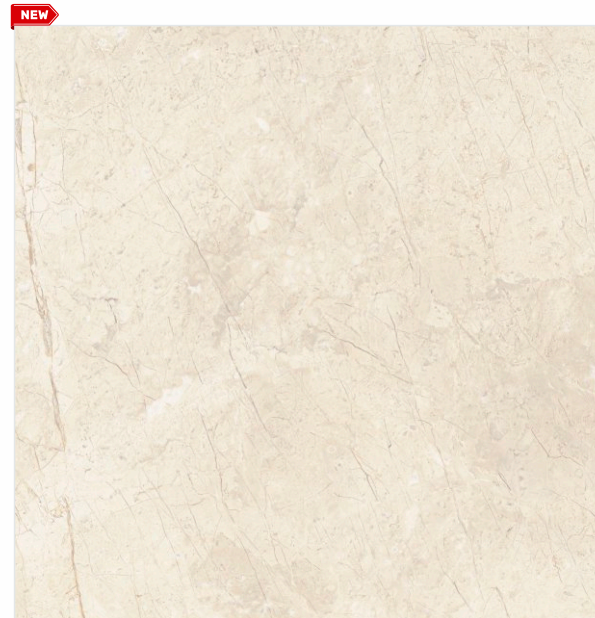

FAB OMAN NATURAL FP

V4

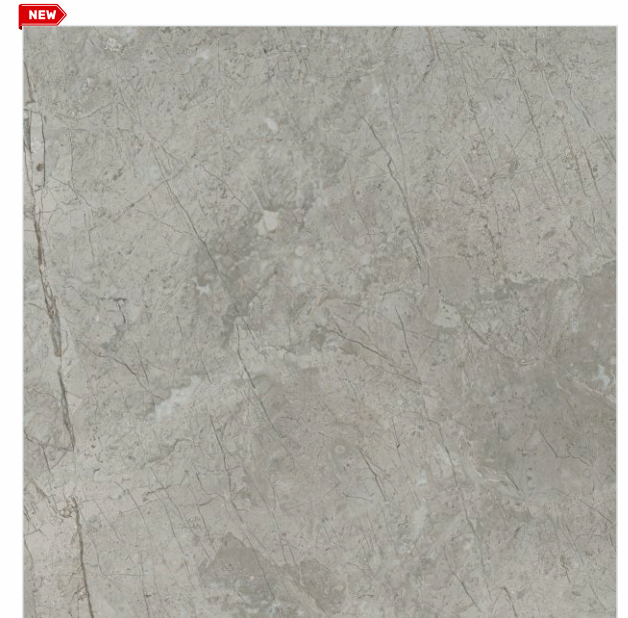


FAB OMAN GREY FP

V4




Tiles Shown: FAB ELISHA GOLD FP

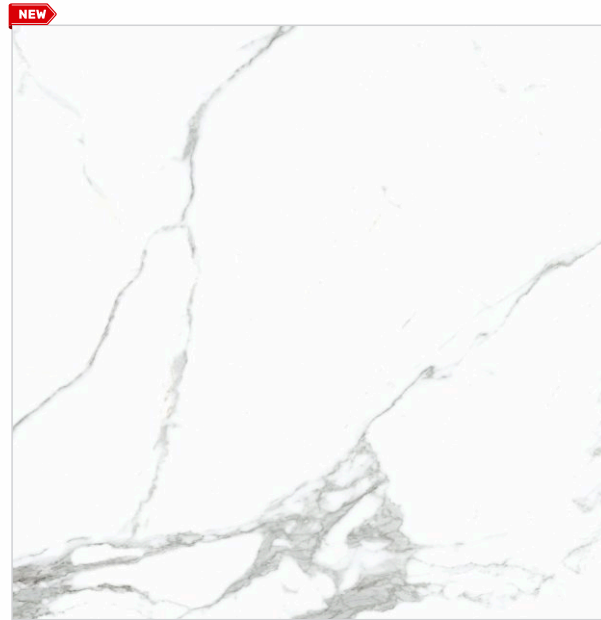


FAB ALP STATORIO FP

V4

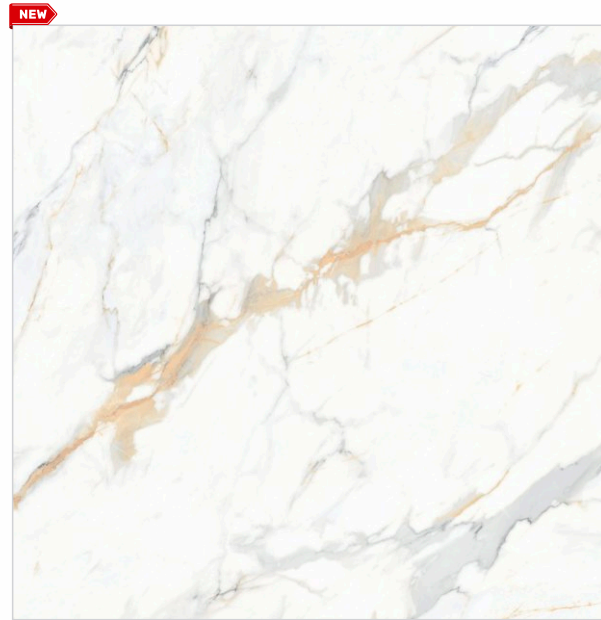

FAB ELISHA GOLD FP

V4

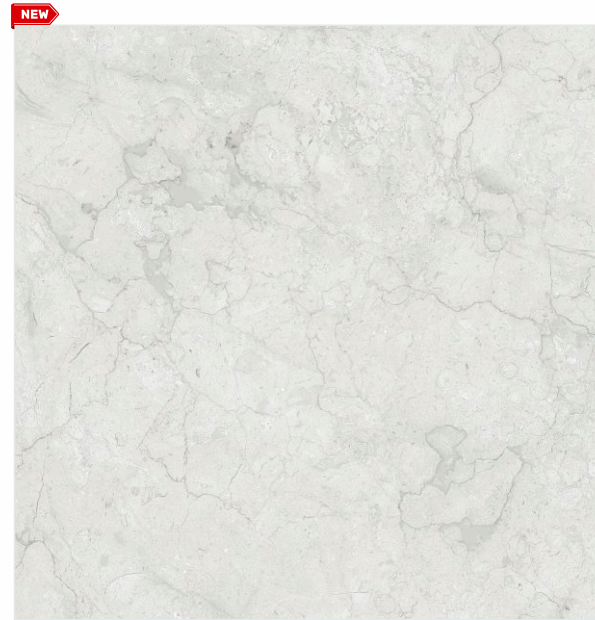


FAB TEAGAN BIANCO FP

V4




FAB TEAGAN GREY FP

V4

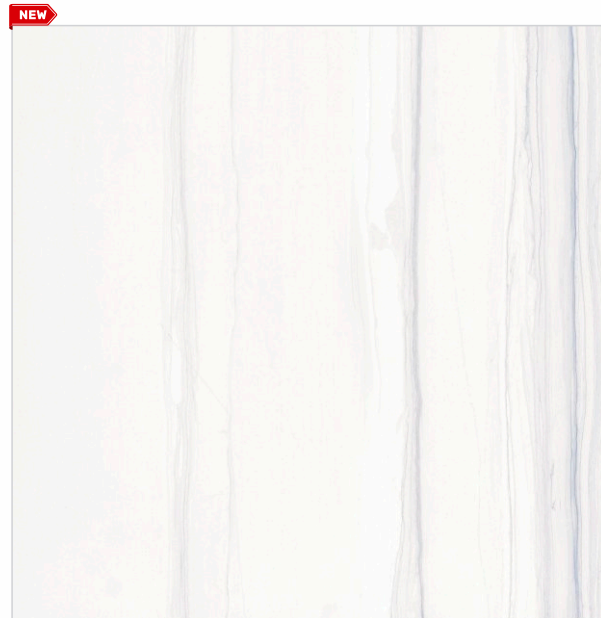


FAB ROYAN BIANCO FP

V4

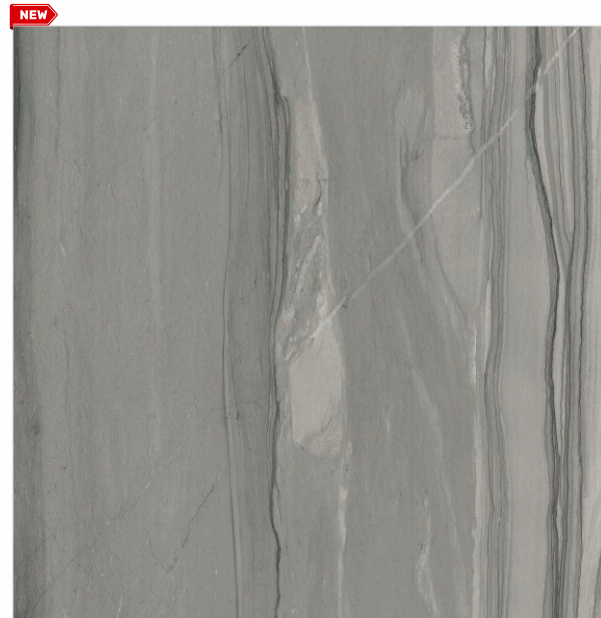

FAB ROYAN GREY FP

V4

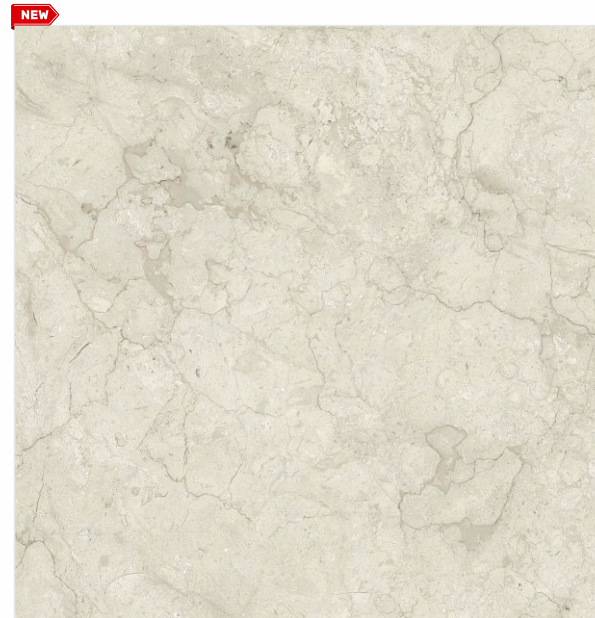


FAB TEAGAN BEIGE FP

V4




FAB TEAGAN BROWN FP

V4

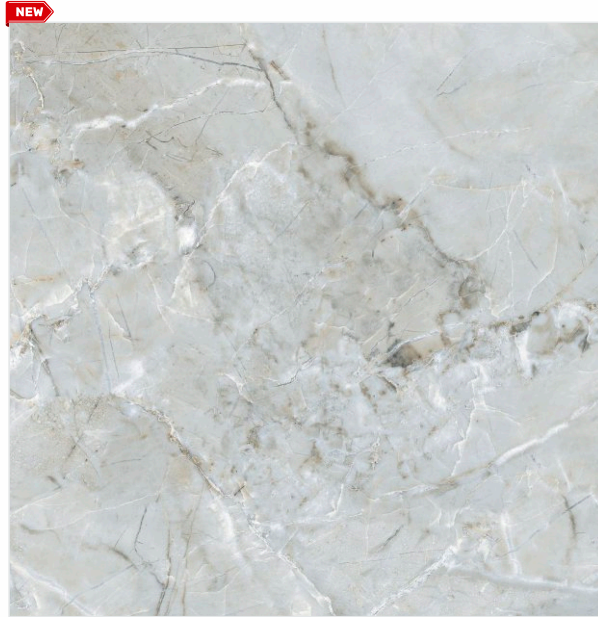


FAB SKY ALBINO FP

V4

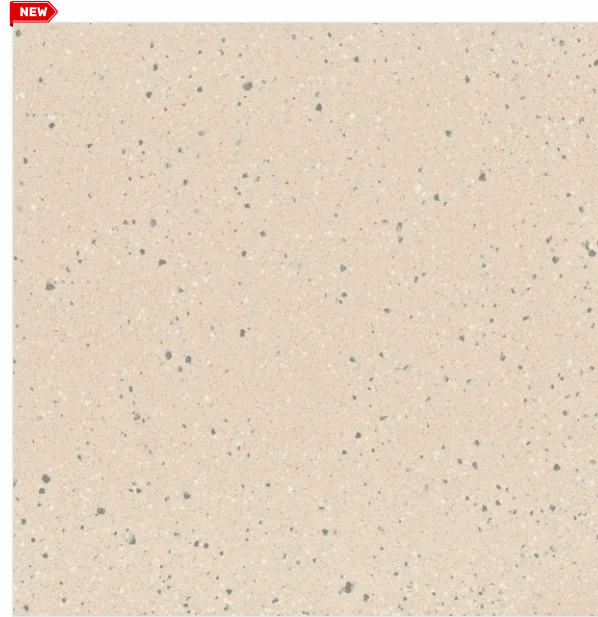

FAB TERRAZO CREMA FP

V2

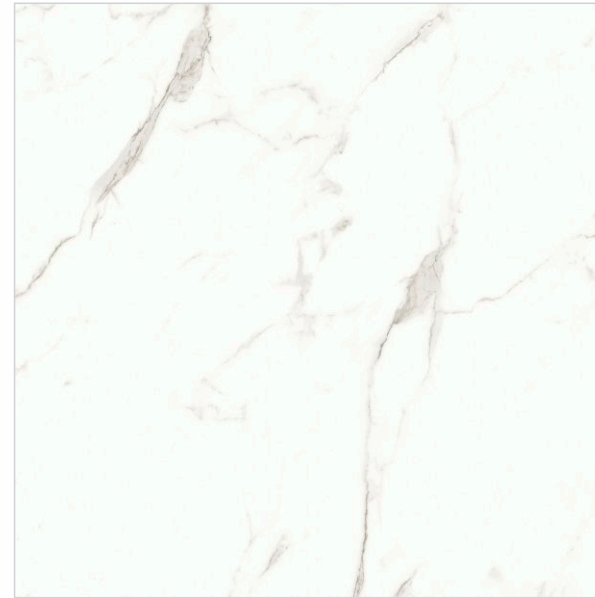


FAB ARIA CALACATTA FP

V4




FAB BARAJAS MARRON LIGHT FP

V3

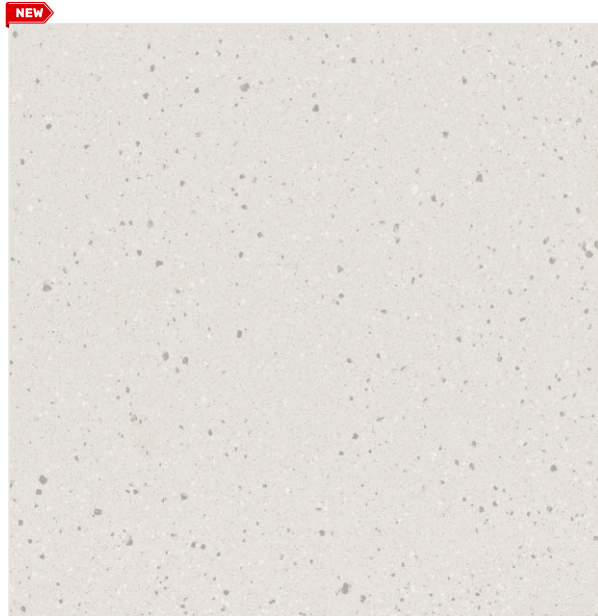

FAB TERRAZO BIANCO FP

V2

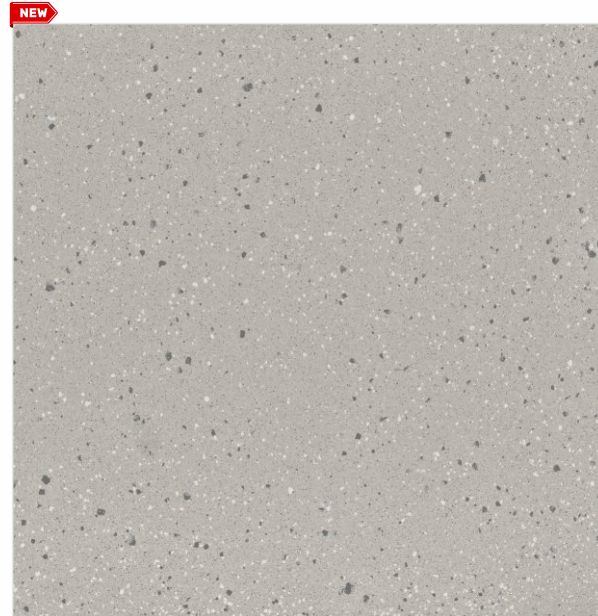

FAB TERRAZO GREY FP

V2



FAB CAMUS LIGHT GREY FP

V4




FAB CUPID GREY FP

V2



FAB MONTANO GREY FP

V4

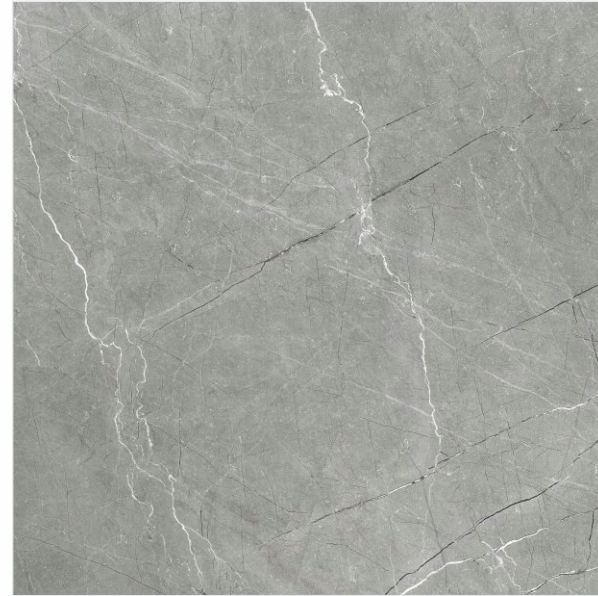

FAB MONTANO GRIS FP

V4




FAB IRISH CREMA FP

V4



FAB IRISH BROWN FP

V4

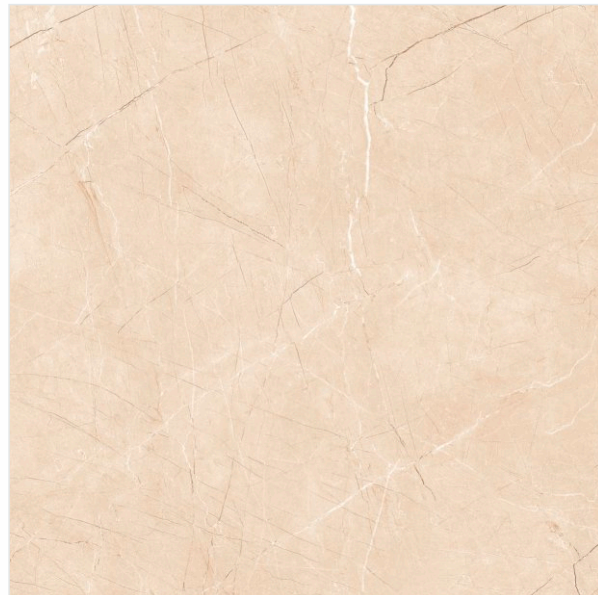


FAB MONTANO CREMA FP

V4



FAB MONTANO BROWN FP

V4




FAB GLACIER WHITE FP

V1



Tiles Shown: FAB CASA MARTIL GREY & FAB EARTH DARK GREY

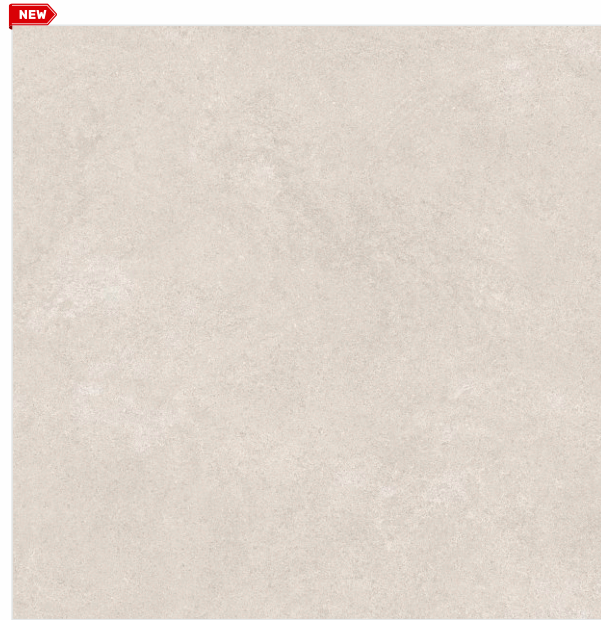


FAB AVALLON GREY

V4



FAB AVALLON NERO

V4

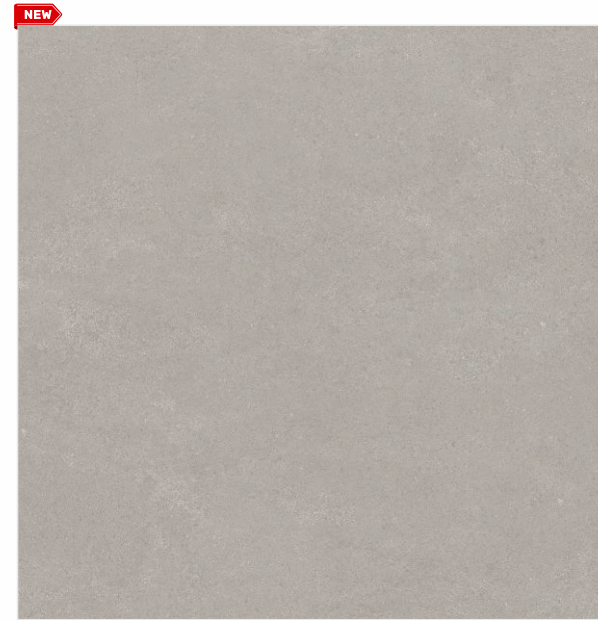


FAB AVALLON MOCHA

V4




FAB CALLIS BROWN

V4

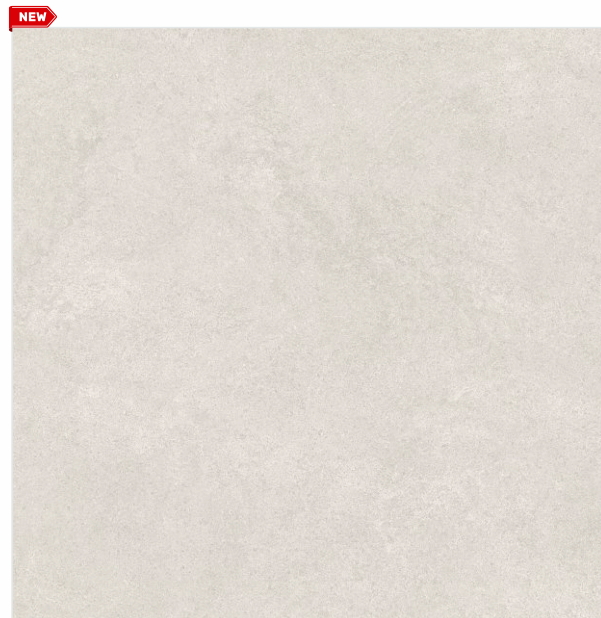


FAB AVALLON CREMA

V4

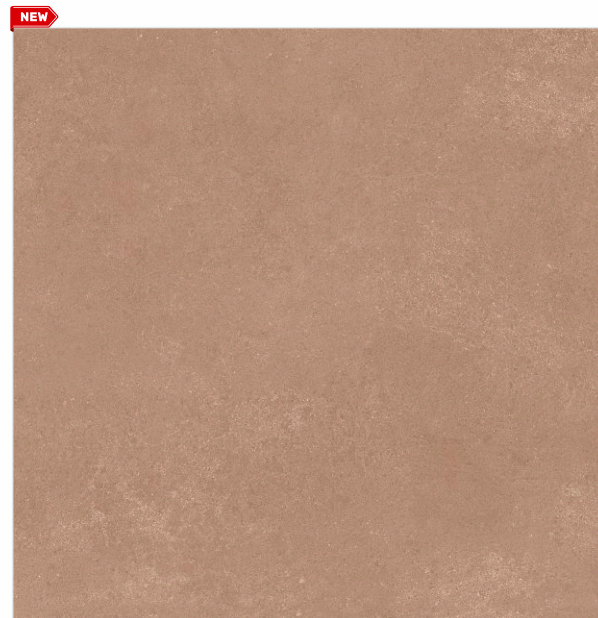


FAB AVALLON BROWN

V4

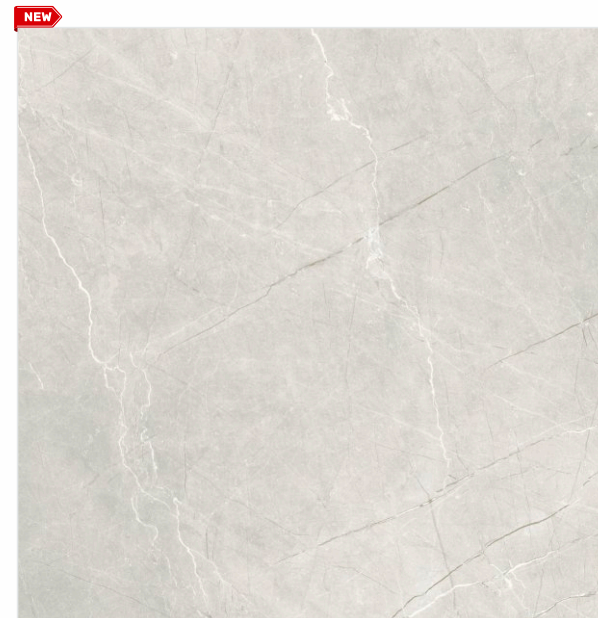


FAB CALLIS LIGHT GREY

V4

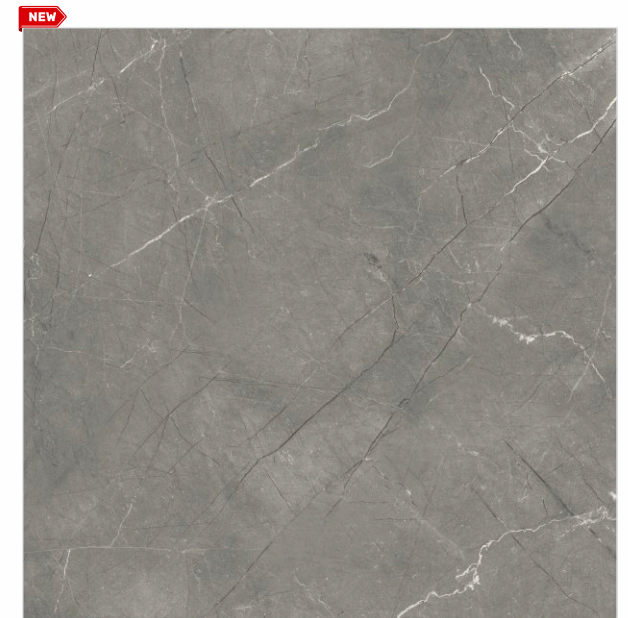


FAB CALLIS DARK GREY

V4

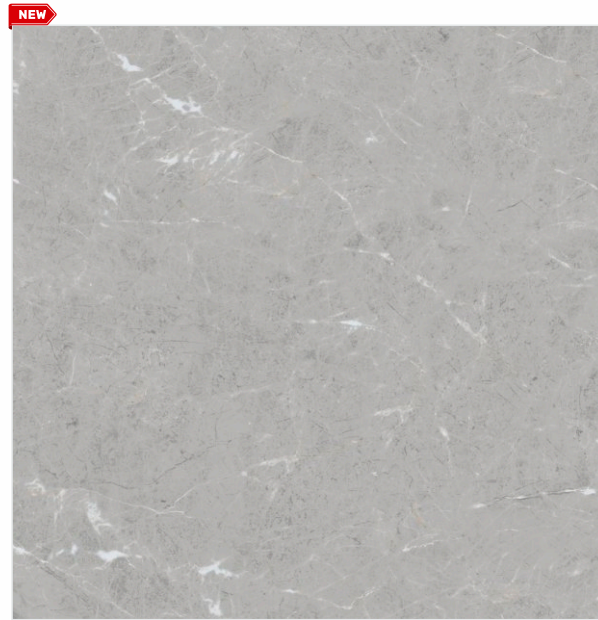

FAB BORIS LIGHT GREY

V4

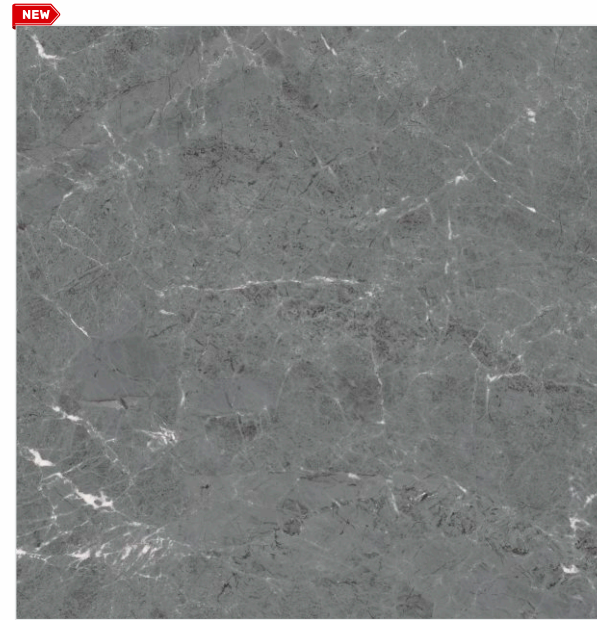


FAB BORIS DARK GREY

V4




FAB NEO ETHOS GREY

V4

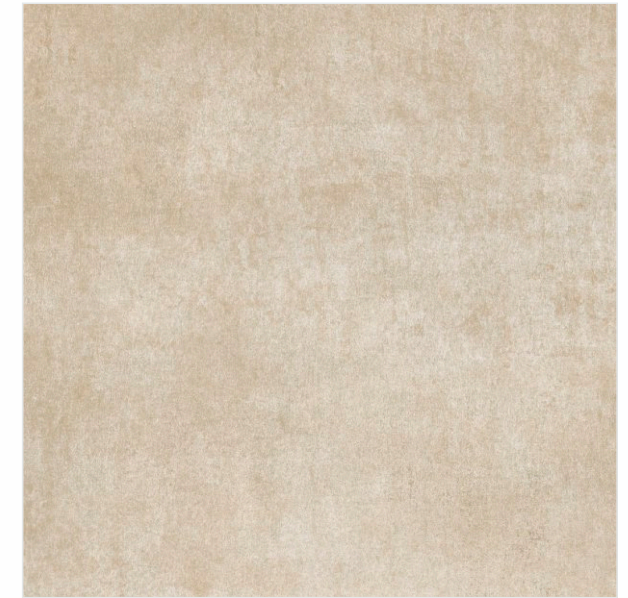


FAB NEO ETHOS BEIGE

V4

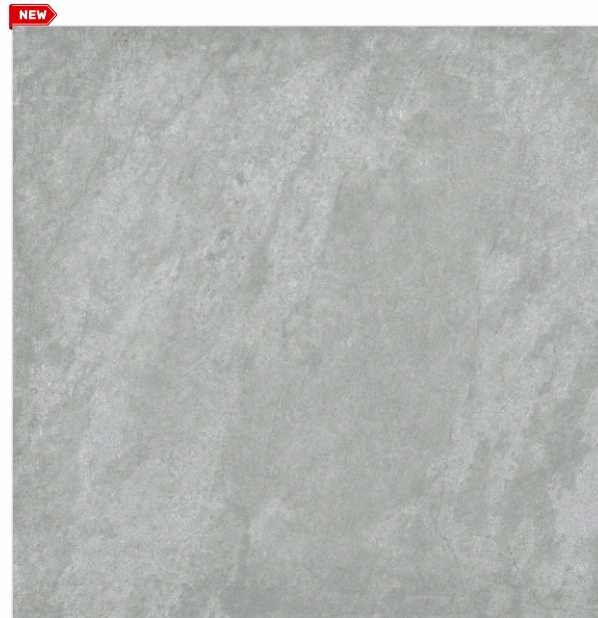

FAB EARTH LIGHT GREY

V3

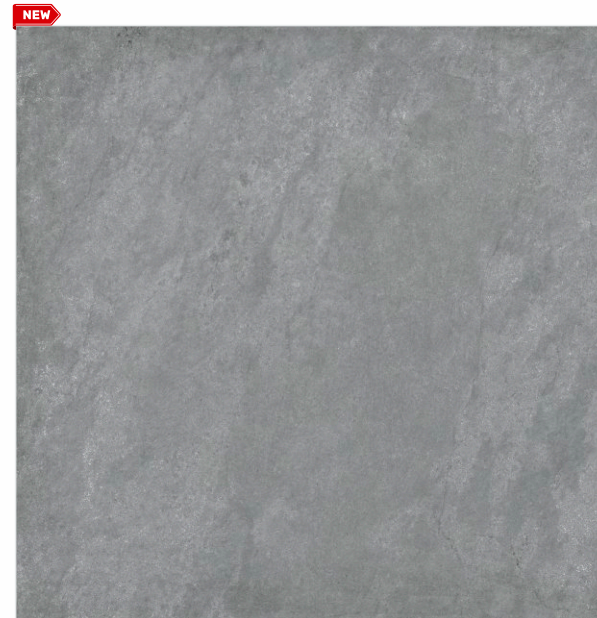

FAB EARTH DARK GREY

V3



FAB NEO ETHOS COTTO

V4




FAB CASA MARTIL GREY

V1



Tiles Shown: FAB CASA AYLIN COPPER & FAB FLOS ROSATO

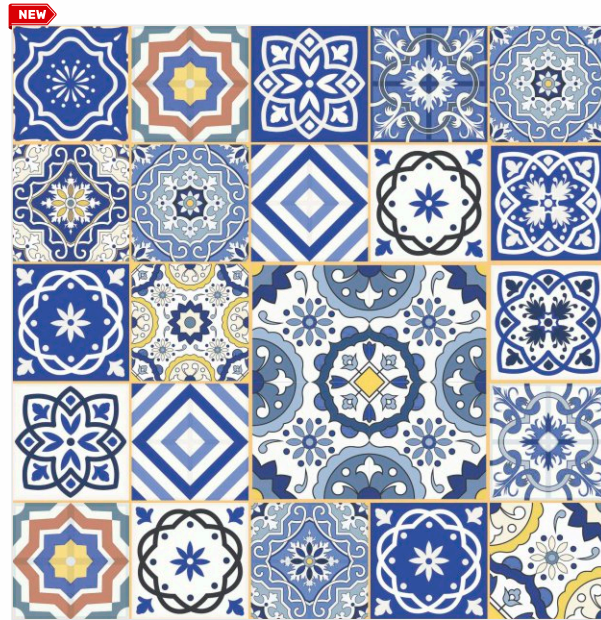


FAB CASA DMITRI BLUE

V4



FAB CASA KENITRA BEIGE

V1

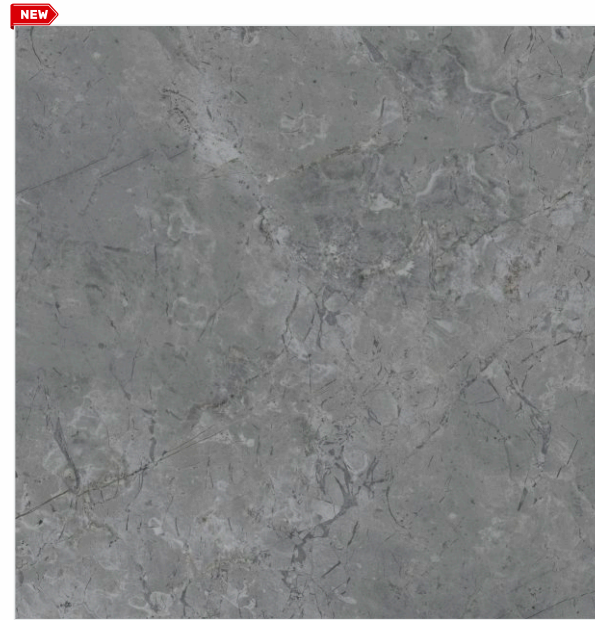


FAB DRAGO GREY DARK

V4



FAB CAMUS DARK GREY

V4

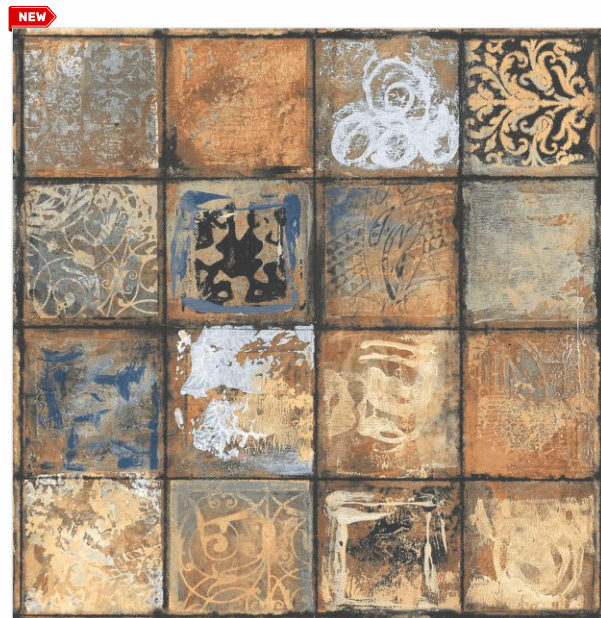


FAB CASA AYLIN COPPER

V2




FAB CASA BELA BEIGE

V1

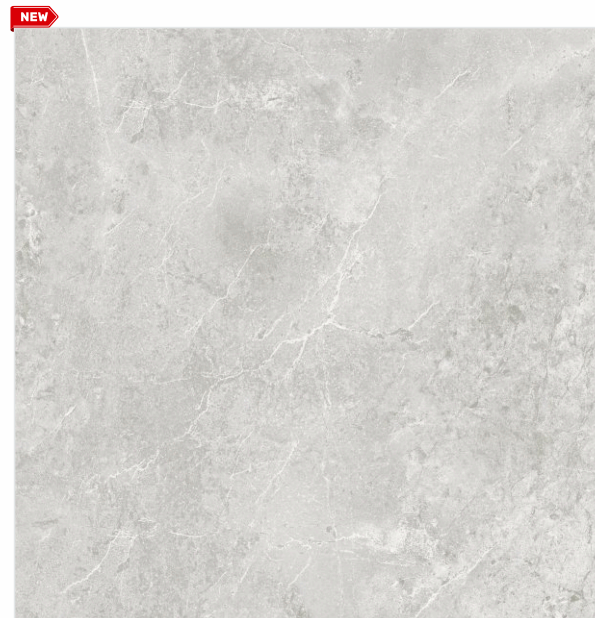


FAB FLOS LIGHT GREY

V4

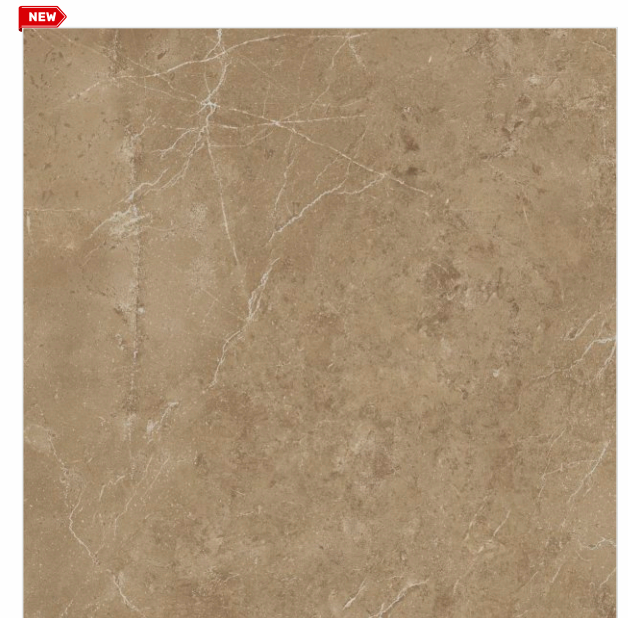


FAB FLOS ROSATO

V4

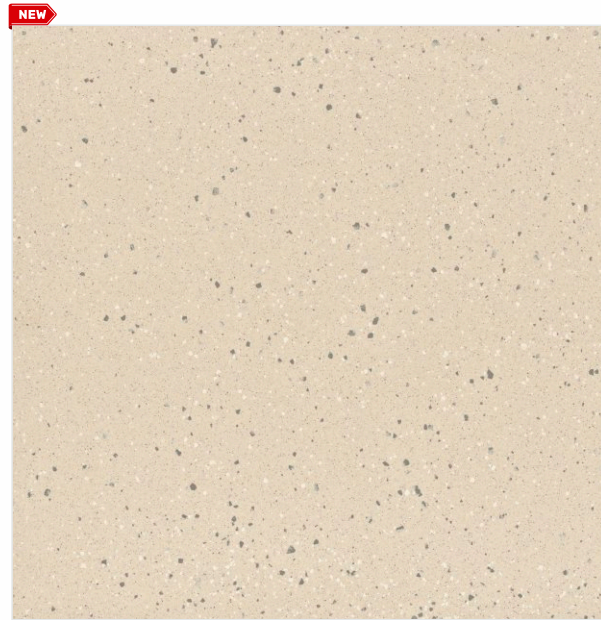


FAB TERRAZO CREMA STONE

V2

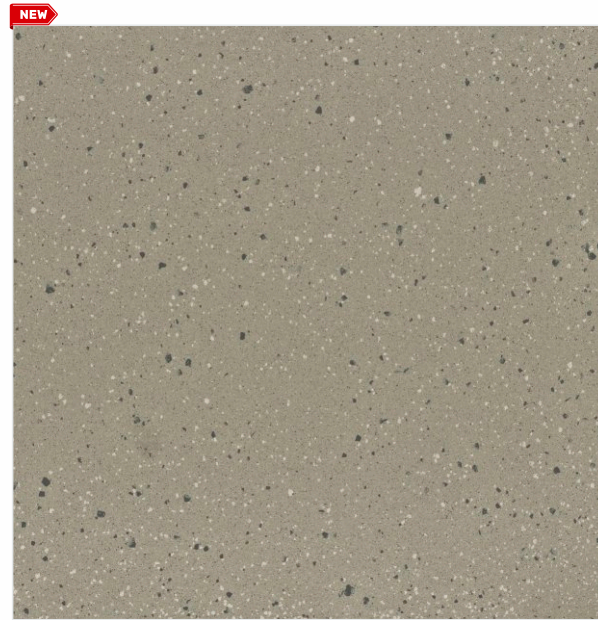


FAB TERRAZO CASTLETON STONE

V2

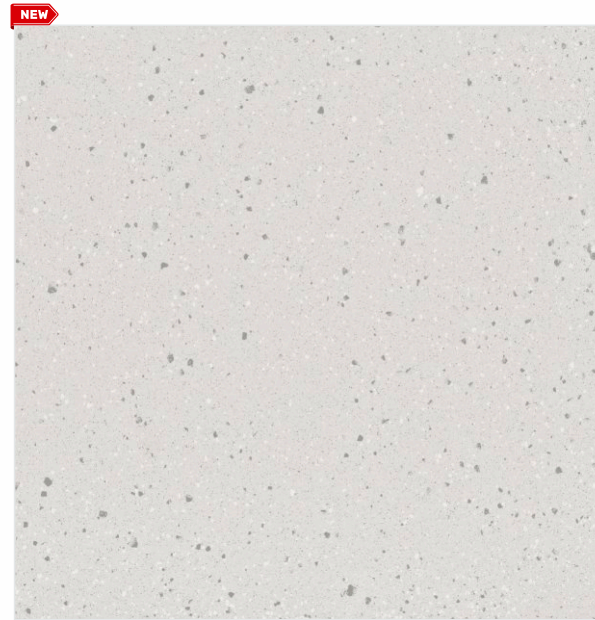


FAB TERRAZO BIANCO STONE

V2

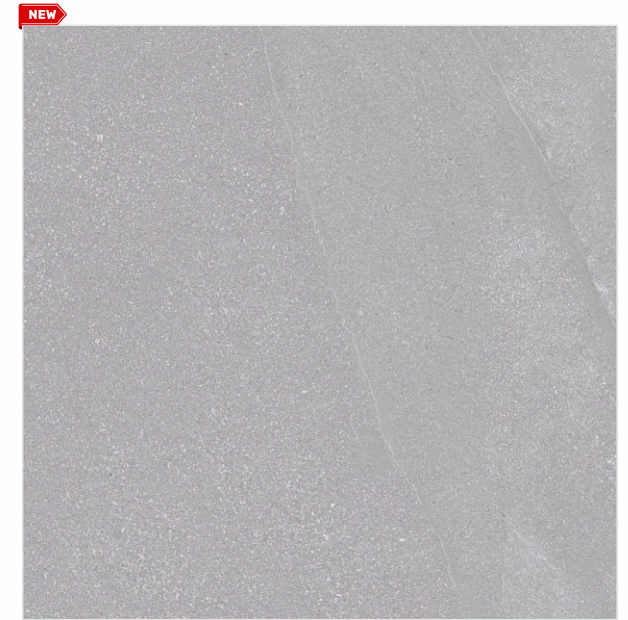


FAB ODER STONE GRIS

V4

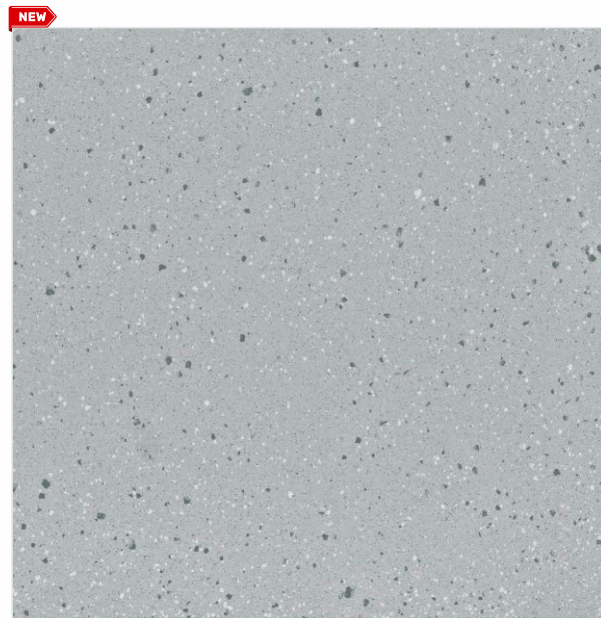


FAB TERRAZO GREY STONE

V2

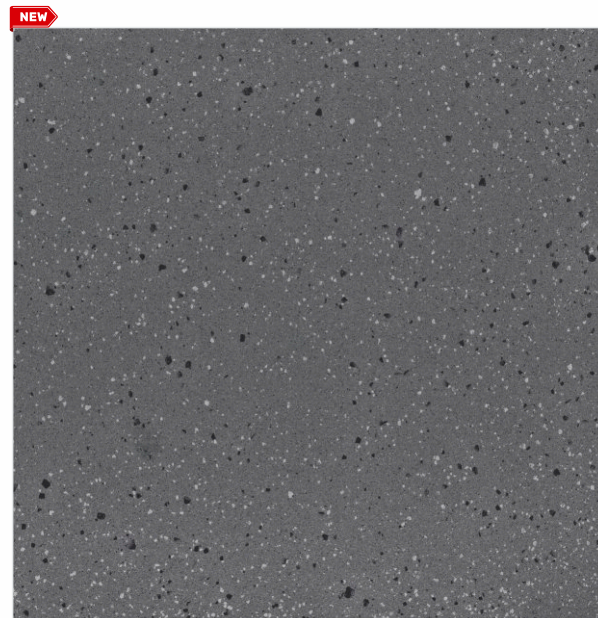


FAB TERRAZO NERO STONE

V2

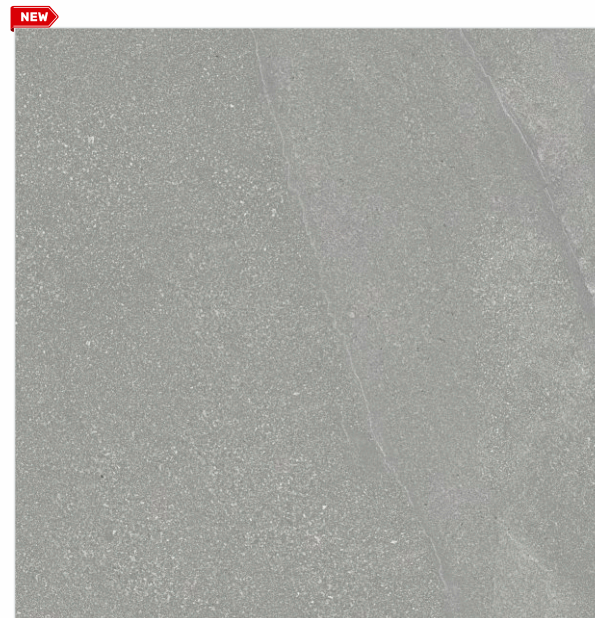

FAB ODER STONE GREY

V4

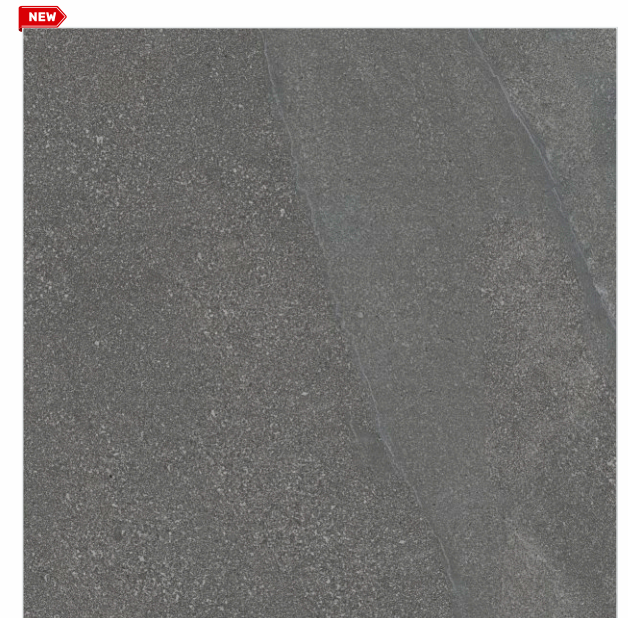


FAB ODER STONE NERO

V4




Tiles Shown: FAB TERRAZO GREY STONE & BIANCO STONE

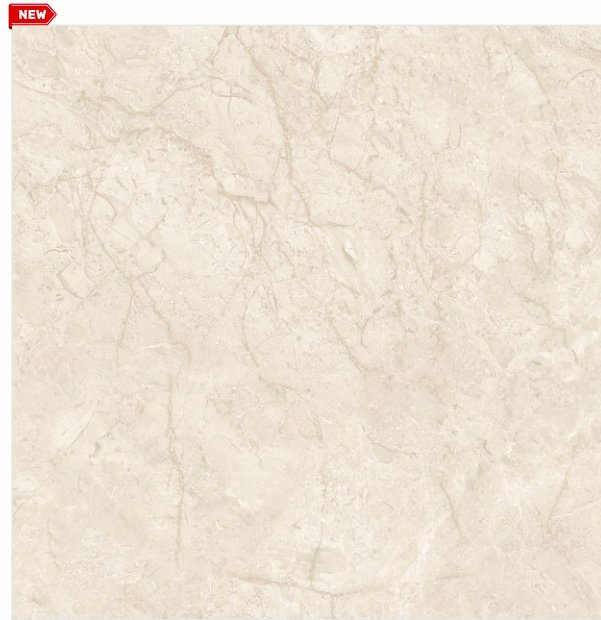


FAB IRISH CREMA

V4

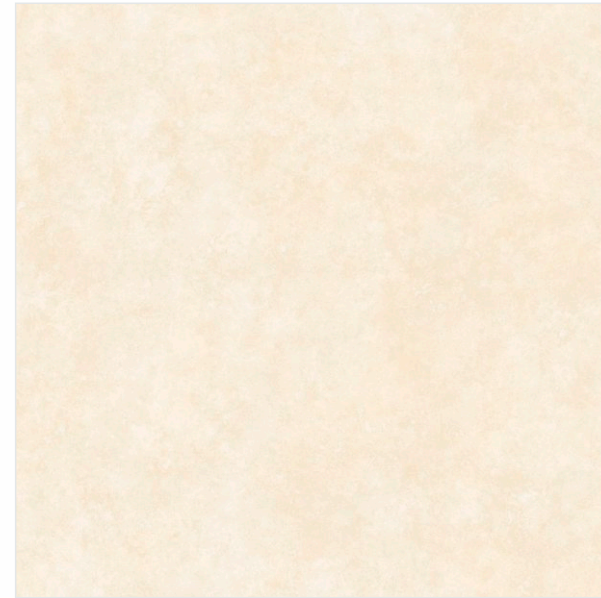

FAB CORONADO STONE BEIGE

V3

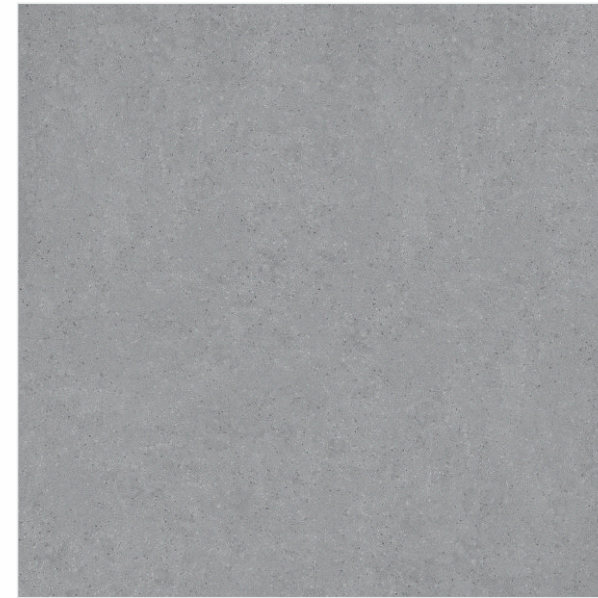


FAB BELDEN STONE ASH GREY

V1



FAB BELDEN STONE IRON

V1

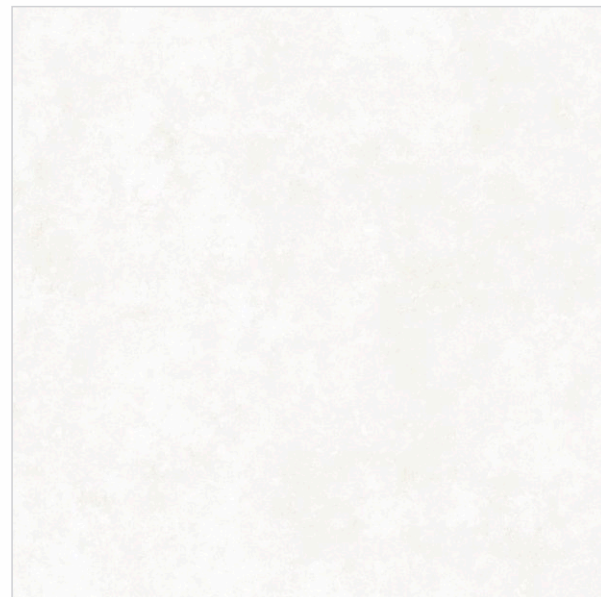

FAB CORONADO STONE BIANCO

V3



FAB CORONADO STONE GREY

V3




FAB BELDEN STONE METAL GREY

V1




FAB BELDEN STONE SAND


V1




FAB GLACIER WHITE VC

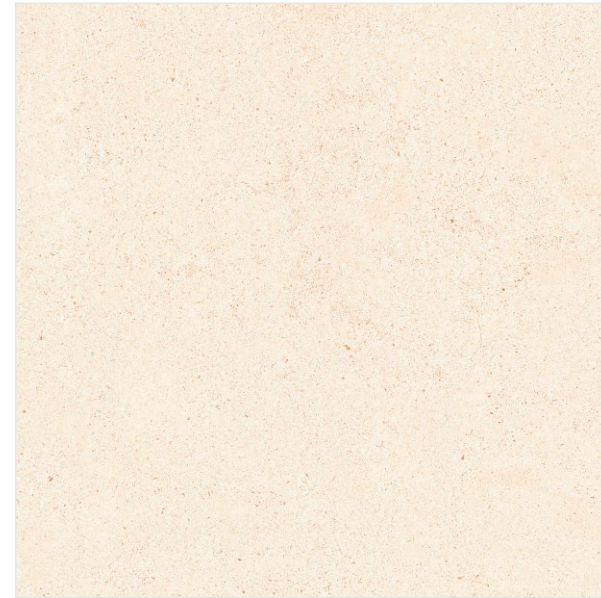


FAB LIVING STONE CREMA VC

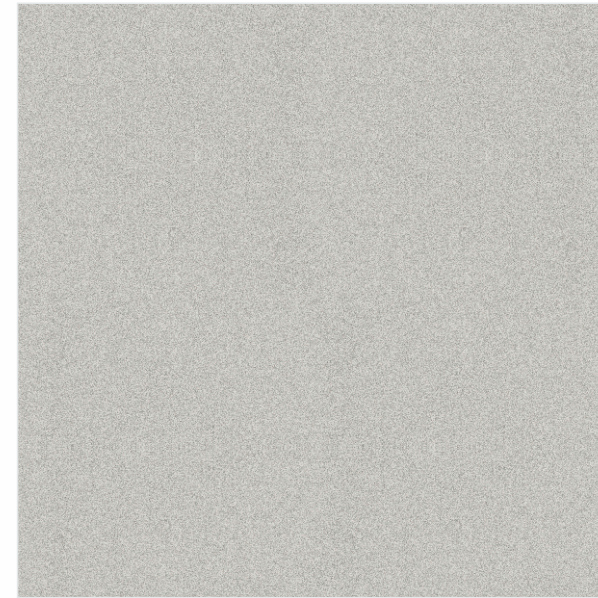


FAB MONTANA GREY VC

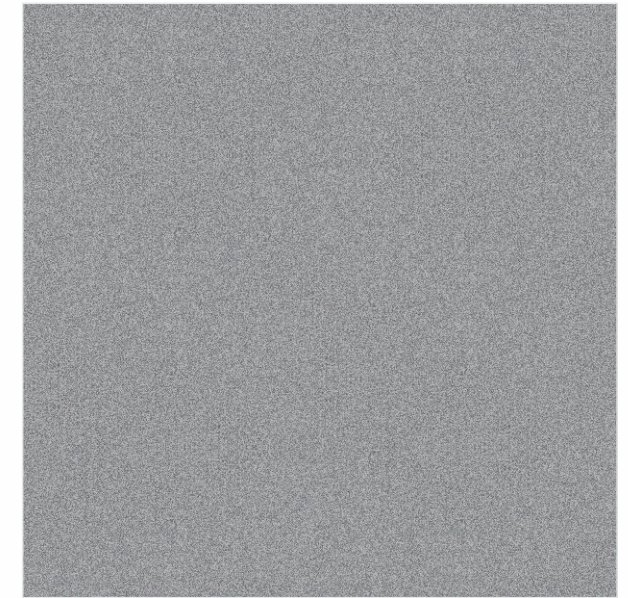


FAB MONTANA NERO VC

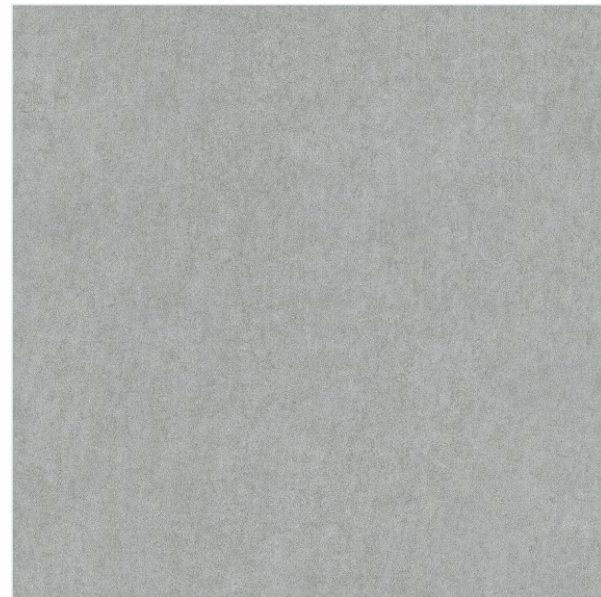


FAB DELMON GREY VC

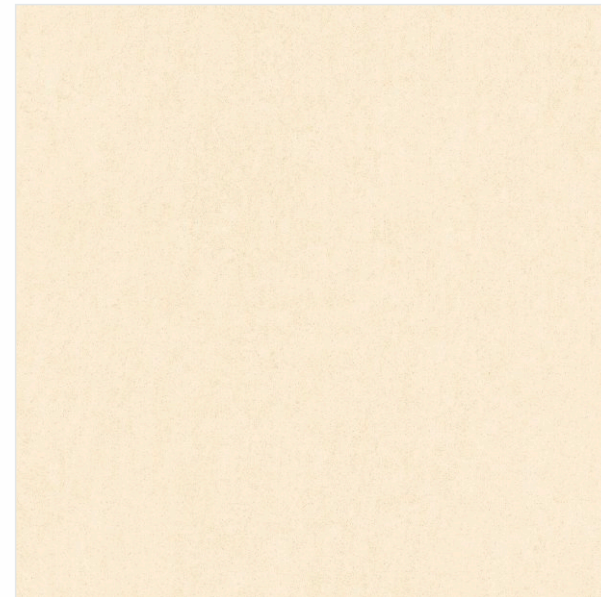

FAB DELMON BEIGE VC

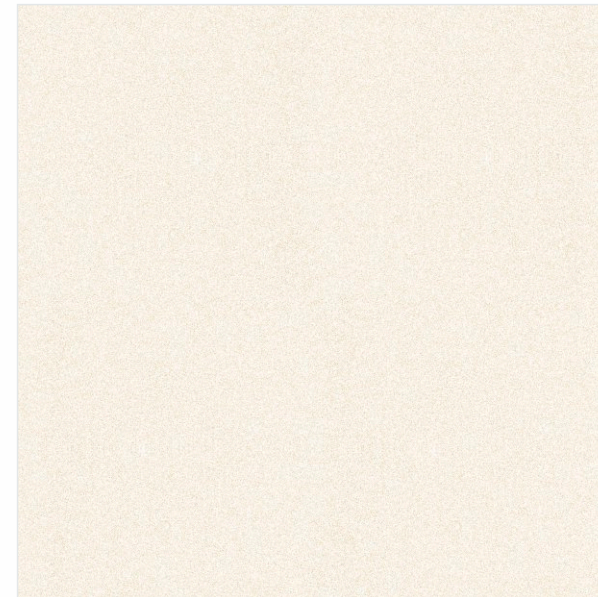


FAB MONTANA BIANCO VC

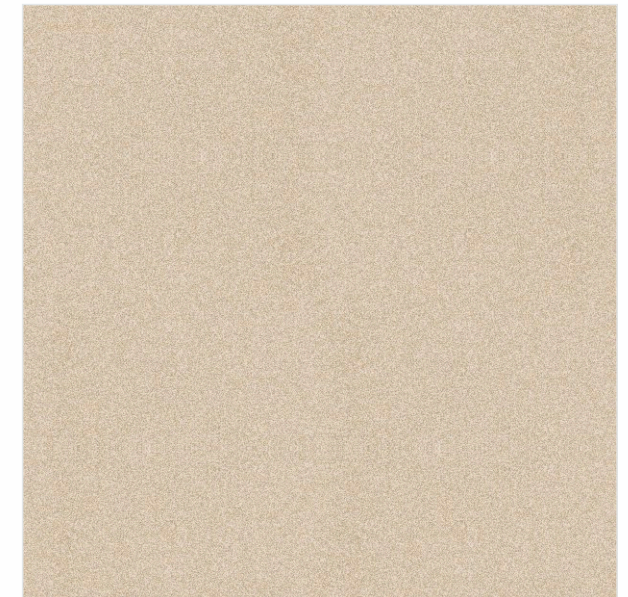

FAB MONTANA BEIGE VC



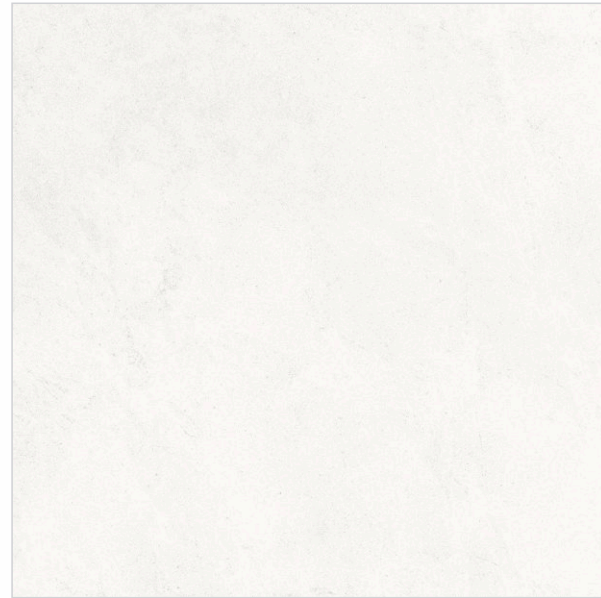

FAB TUSCAN STONE BIANCO

V4



FAB TUSCAN STONE STEEL GREY

V4



FAB TIVOLI STONE CREMA

V3



FAB TIVOLI STONE TAN

V3



FAB TUSCAN STONE MUSHROOM

V4




FAB TUSCAN STONE BROWN

V4



FAB TIVOLI STONE COFFEE

V3

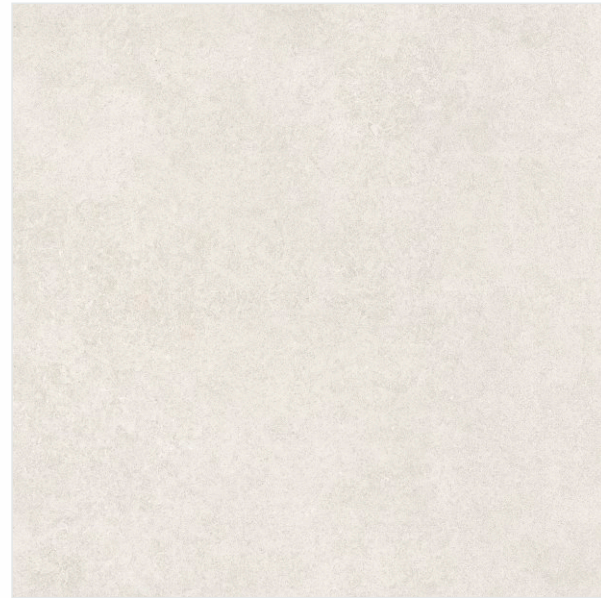


FAB ESCARA GREY LIGHT

V4




FAB SANDSTONE LIGHT GREY

V4

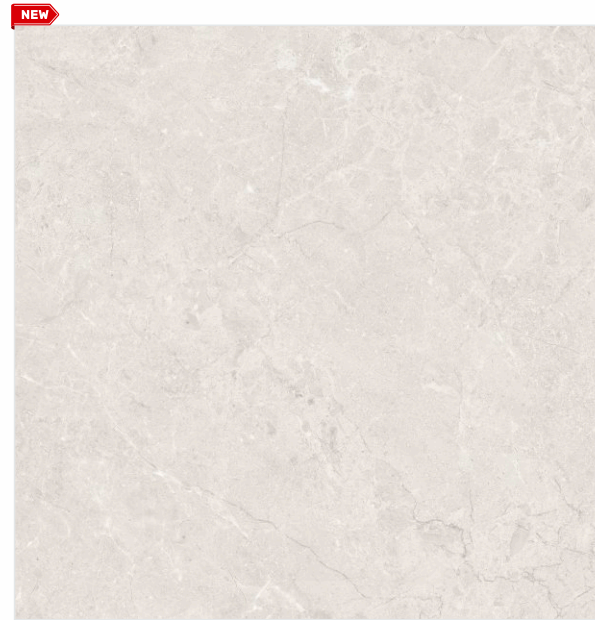

FAB IMP ADRIK BIANCO

V4

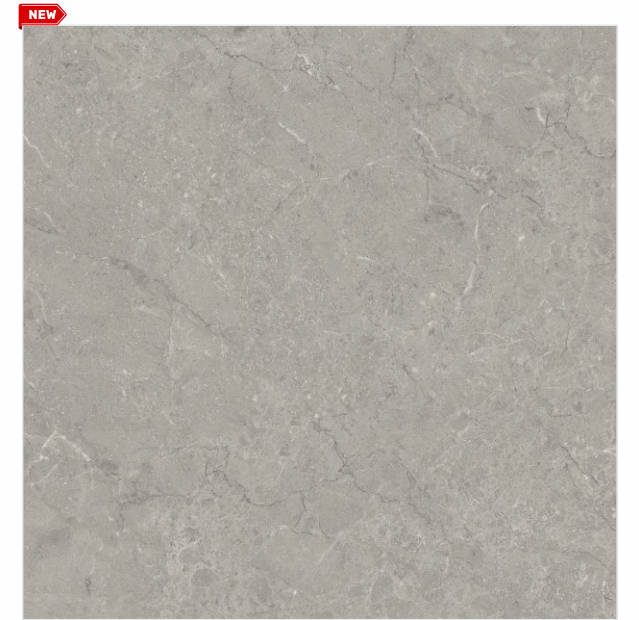


FAB IMP ADRIK GREY

V4




Tiles Shown: FAB ESCARA GREY LIGHT

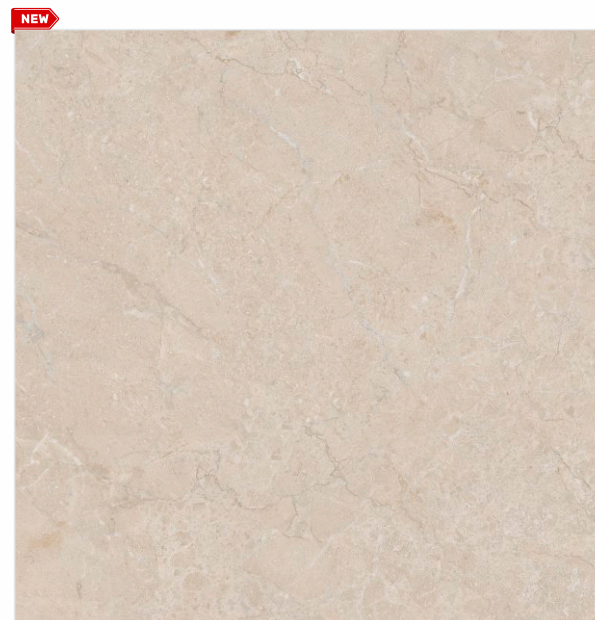


FAB IMP ADRIK BEIGE

V4

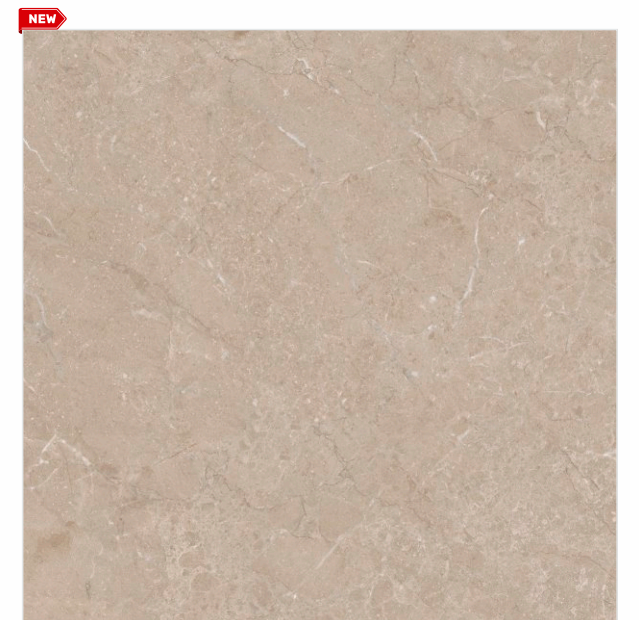


FAB IMP ADRIK MUSHROOM

V4

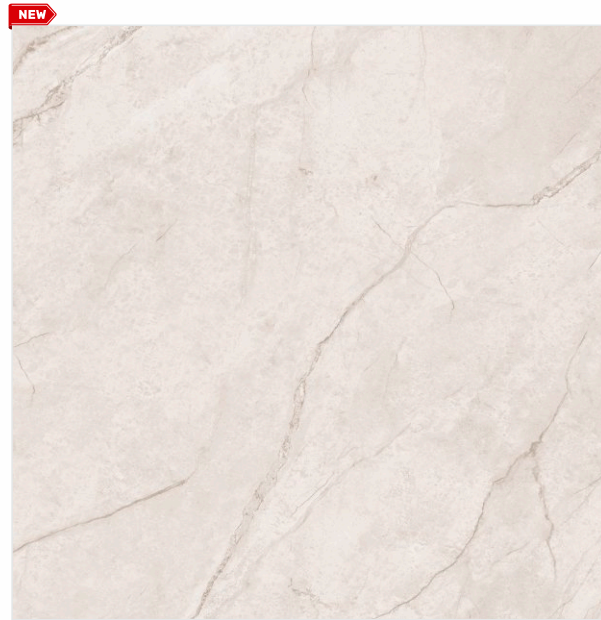

FAB IMP ANYA ASH

V4

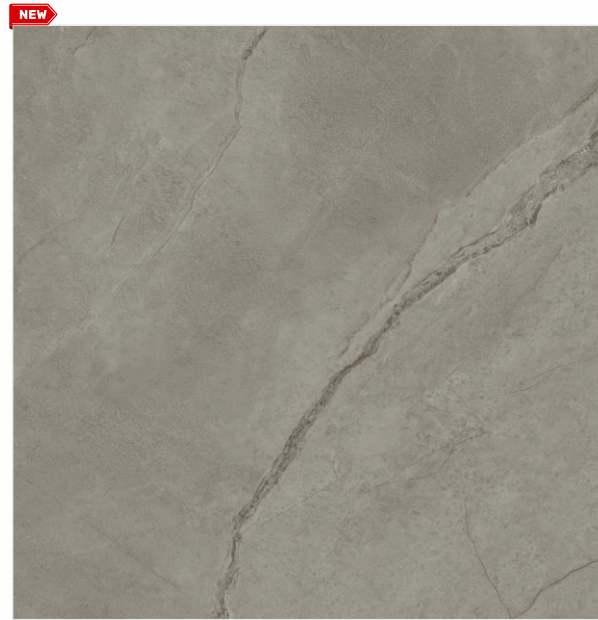

FAB IMP ANYA GREY

V4



FAB IMP CAMERON BIANCO

V4



FAB IMP CAMERON COFFEE

V4




Tiles Shown: FAB IMP CAMERON COFFEE

DESIGN, PATTERN & SHADE VARIATION GUIDE

Current development efforts have made ceramic tiles to resemble and look authentically identical to natural material (Stone, Wood, Fabric), and it has become increasingly difficult in many cases, to distinguish between two.

Recognising this situation, it is necessary to be informed on the grade of design & pattern variation that is expected from these products. As a general reference, the design & Pattern guide below classifies a scale of ranges according to the degree of variation.

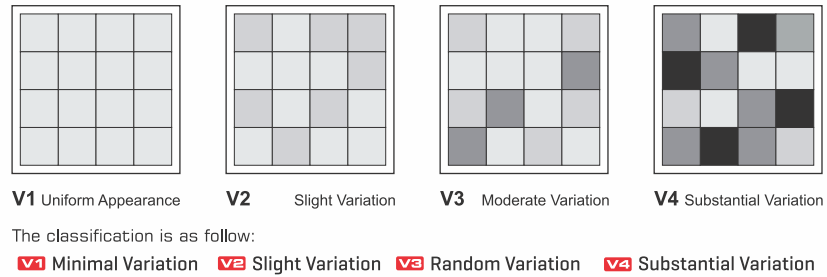

While laying the tiles please follow the arrow on the back of the tiles.
 For removing the wax from the surface of the tiles please use the soft cotton cloth for rubbing with any boric/talk powder




High Definition Image




VEILCRAFT (VC) SHIELD

Not only look and style; the buzz word for the Gen X tile is timeless elegance. Here comes the revolutionary patented "VeilCraft (VC) Shield" technology, a 'high abrasion resistant glaze composition', known as VC (VeilCraft) Shield. This is the first ever patented technology in Indian Ceramic Industry. This not only gives you the perfect aesthetics for your space but also the lifelong protection to your floor.

Result Of The abrasion test at 25,000 revolutions as per the PEI Methodology

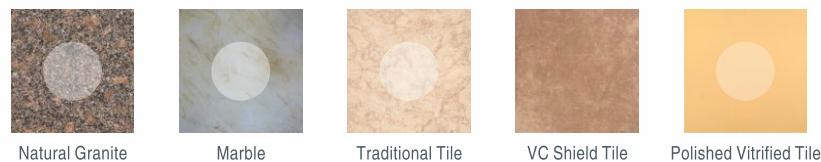

Patent Certificate for
 "High Abrasion Resistant Glaze"
 applied on VC Shield Tiles

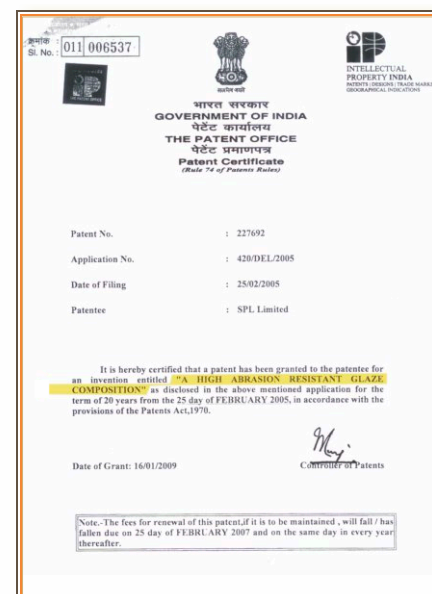

PACKING DETAIL FOR 600X600MM GLAZED VITRIFIED TILES

Nominal Size	Thickness(mm)	Average weight per carton (Kgs)	No. of tiles per carton	Coverage area per carton
600 x 600mm	8.5 mm	27.40	4	1.44sq.mtr./15.50sq.ft.

TECHNICAL SPECIFICATION FOR 600X600MM GLAZED VITRIFIED TILES

Characteristics	Requirement as per IS 15622 :2017 E ≤ 0.08 Group B I a	Requirement as per ISO 13006:2018 ≤ 0.5% Group B I a	Our Values	Test Method
A) Dimension & Surface Quality				
I) Length & Width	± 0.10%	± 0.5%	± 0.10%	IS 13630 Part 1/ ISO 10545-2
ii) Thickness	± 5.00%	± 5.00%	± 4.0%	
iii) Straightness of Side	± 0.10%	± 0.50%	± 0.10%	
iv) Rectengularity	± 0.10%	± 0.60%	± 0.10%	
v) Surface Flatness				
a) Center curvature (max.Deviation)	± 0.50%	± 0.50%	± 0.2 %	
b) Edge curvature (max.Deviation)	± 0.50%	± 0.50%	± 0.2 %	
c) Corner warpage (max.Deviation)	± 0.50%	± 0.50%	± 0.2 %	
vi) Surface Quality	Min. 95 % of tiles will be free from visible defects	Min. 95 % of tiles will be free from visible defects	Min. 95 % of tiles will be free from visible defects	
B) Physical Properties				
I) Water Absorption	Average ≤ 0.08%, Individual Max.0.1%	Av ≤ 0.5 %, Individual 0.6% max	<0.08%, Individual Max 0.1%	IS 13630 Part 2/ ISO 10545-3
ii) Modulus of Rupture [N/mm2]	Avr 35, Individual 32 Min	Avr 35, Individual 32 Min	Avr. > 35, Individual 32	IS 13630 Part 6/ISO 10545-4
iii) Breaking Strength in N	1300	Min 1300	Min 1300	
iv) Moisture Expansion in mm/m	0.02	Test method available	0.02	IS 13630 Part 3/ISO-10545-10
v) Scratch Hardness of surface (Mohs)	Min 5	N.A	Min.5 (for Matt & RT), Min.3 (for Polished)	IS 13630 Part 13
vi) Resistance to Abrasion of glazed tiles(Class I to V)	Min II	Abrasion Class & Cycle passed	Class-V(for Matt & RT), Class-III(for Polished)	IS 13630 Part 11 /ISO 10545-7
vii) Coefficient of linear thermal expansion from embiant temperature to 100° C	6 X 10 ⁻⁶ K ⁻¹ max	Test method available	6 X 10 ⁻⁶ K ⁻¹ max	IS 13630 Part 4/ ISO 10545-8
viii) Thermal Shock Resistance	10 cycle Min	Required	10 cycle passed	IS 13630 Part 5/ISO-10545-9
ix) Craziing Resistance	4 cycle @ 7.5bar min	Required	4 cycle passed	IS 13630 Part 9/ISO 10545-11
x) Impact Resistance as Co-efficient of Restitution (COR)	0.55 min	Test method available	0.55 Min	IS 13630 Part 14/ISO 10545-5
xi) Frost Resistance	Required	Required	100 Cycle Passed	IS 13630 Part 10/ISO 10545-12
C) Chemical Resistance (glazed Tiles)				
I) Stain Resistance	Min Class 1	Min Class 3	Min Class-1(For Matt), Min Class-2(for Polished)	IS 13630 Part 8 & ISO 10545-14
ii) Resistance to household chemicals	Min Class AA	Min B	Min Class AA	IS 13630 Part 8/ ISO 10545-13
iii) Resistance to acids and alkalis (with exception of hydrofluoric acid and its compounds)	Required if agreed	Declared Value'	Min Class AA	

The reproduction of tiles in this catalogue is restricted to four color printing only and tiles are not in relative sizes, therefore customers are advised to see the physical sample before placing the order. " Technical Specification" for Somany wall & floor tiles are applicable only for premium quality tiles. Please inspect all tiles prior to installation. Company will not entertain complaints once tiles are laid/fixed. Complaints will not be entertained for Borders, Highlighters & Motifs.

SOMANY
Bathware

Our
PORTFOLIO



Water Closets | Basins | Faucets | Showers | Water Heaters | Accessories

Ezy Fix

TILES ADHESIVES & GROUTS

SOMANY



**HIGH STRENGTH POLYMER MODIFIED
TILE ADHESIVE**



BENEFITS

- » READY AND EASY TO USE
- » EXCELLENT BONDING WITH ALL SURFACES
- » FAST SETTING
- » SELF-CURING

USES

- » FOR FIXING ALL TYPE OF TILES
- » FOR NEW FLOORING AND RENOVATION
- » CAN BE USED FOR TILE ON TILE